

FLOS

F015J32D033 Anthracite

Mile Bollard 2 600 Double Dimmable DALI

Designed by Antonio Citterio, 2020



LED light source included. Integrated 220-240V ON/OFF electrical power. Equipped with a length of neoprene cable and an IP68 2-way anticondensation H2O stop seal system. The device may be installed on any flooring with anchors. Anchoring plate for installation on flooring laid over concrete sold separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|------------------------|----------------------|
| EAN | 8054793235264 |
| Mounting | Ground |
| Environments | Outdoor wet location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 2 |
| System power (W) | 15.6 |
| Lumen Output (lm) | 1254 |

Physical

| | |
|-----------------|------------|
| Colour | Anthracite |
| Orientation | Fixed |
| Net weight (kg) | 5.04 |
| IP internal | 65 |

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing




Beam Angle: 57°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 195 | 4.54 |
| 2 | 49 | 9.08 |
| 3 | 22 | 13.62 |
| 4 | 12 | 18.16 |
| 5 | 8 | 22.70 |

Ecodesign and Energy

Labelling

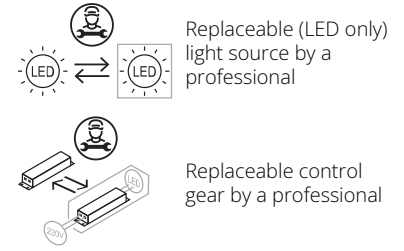

Photometric

| | |
|--------------------|------------|
| Lighting type | Direct |
| Light distribution | Asymmetric |
| CCT (K) | 3000 |
| CRI> | 80 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|-------------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Dimmable | Yes |
| Power supply type | Dimmable DALI 1 |
| Dimming interface | Dimmer Integrated |
| Emergency | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

F015Z010000

Base plate with bolt