

# FLOS

■ F030B23A030 Black

## Mile Recessed 1

Designed by Antonio Citterio, 2020

702lm - 2700K - CRI> 80 - Beam° 40

LED light source included. Integrated 220-240V ON/OFF and 1-10V/DALI dimmable electrical power. Equipped with neoprene cable outlet and double cable grommet for in/out connection. Ceiling mounting springs included. Box for brick roofing installation to be ordered separately.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793548845        |
| Mounting               | Ceiling recessed     |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| System power (W)       | 11                   |
| Lumen Output (lm)      | 702                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Black |
| Orientation         | Fixed |
| Net weight (kg)     | 0.87  |
| Package height (mm) | 97    |
| Package width (mm)  | 221   |
| Package length (mm) | 124   |
| IP internal         | 66    |

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP

### Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



## Schematic light drawing



| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1749  | 0.71 |
| 2    | 437   | 1.42 |
| 3    | 194   | 2.14 |
| 4    | 109   | 2.85 |
| 5    | 70    | 3.56 |

## Photometric


|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 40        |
| Beam angle C90-270 (°) | 40        |
| Extreme cut off        | No        |

## Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Power supply type  | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

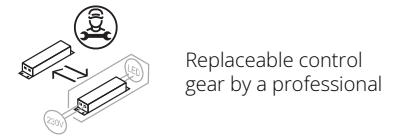

## Accessories & Power Supply



### OPTIONAL Accessory

F990C00A000

2 way terminal block 4 poles IP68  
H2O stop. (ø5,5÷12mm cable)



### OPTIONAL Accessory

F990C010000

3/4 way terminal block 4 poles  
IP68 H2O stop. (ø5,5÷12mm  
cable)



### OPTIONAL Accessory

F030Z010000

Metal installation box for  
concrete ceiling