

# FLOS

■ F015A22A030 Black

## Mile Wall 1 Asymmetric Down

Designed by Antonio Citterio, 2020




8W - 283lm - 2700K - CRI > 80

LED light source included. Integrated 220-240V ON/OFF electrical power. Equipped with double cable gland for electrical connection.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793223193 |
| Mounting               | Wall          |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | Power LED     |
| Number of lamps        | 1             |
| Power (W)              | 8             |
| System power (W)       | 8.1           |
| Lumen Output (lm)      | 283           |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Black |
| Orientation         | Fixed |
| Net weight (kg)     | 0.54  |
| Package height (mm) | 80    |
| Package width (mm)  | 100   |
| Package length (mm) | 120   |
| IP internal         | 65    |
| Drive Over          | No    |

### Download

[Mounting instructions](#) ZIP

### Photometric Files

[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing



|             |       |       |
|-------------|-------|-------|
| Beam Angle: | 51°   |       |
| h(m)        | E(lx) | D(m)  |
| 1           | 85    | 3.34  |
| 2           | 21    | 6.68  |
| 3           | 9     | 10.03 |
| 4           | 5     | 13.37 |
| 5           | 3     | 16.71 |

Luminous flux luminaire  
283 lm

## Photometric


|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 80         |
| Extreme cut off    | No         |

## Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Power supply type  | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

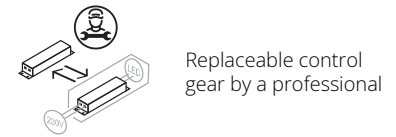

## Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)