


# FLOS

F015D22D000 Primer

## Mile Wall 2 Asymmetric Down Dimmable DALI

Designed by Antonio Citterio, 2020

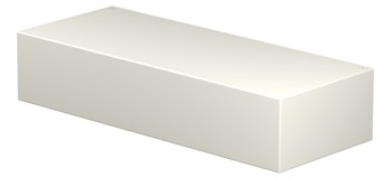


8W - 603lm - 2700K - CRI> 80

LED light source included. Integrated 220-240V ON/OFF and 1-10V or DALI dimmable electrical power. Equipped with double cable gland for electrical connection.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

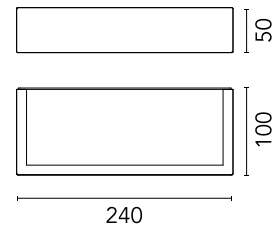

### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793226743 |
| Mounting               | Wall          |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | Power LED     |
| Number of lamps        | 1             |
| Power (W)              | 8             |
| System power (W)       | 7.8           |
| Lumen Output (lm)      | 603           |

### Physical

|                     |        |
|---------------------|--------|
| Colour              | Primer |
| Orientation         | Fixed  |
| Net weight (kg)     | 1.08   |
| Package height (mm) | 80     |
| Package width (mm)  | 100    |
| Package length (mm) | 245    |
| IP internal         | 65     |
| Drive Over          | No     |

### Download

[Mounting instructions](#) ZIP

### Photometric Files

[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing



Beam Angle: 57°

| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 187   | 4.54  |
| 2    | 47    | 9.08  |
| 3    | 21    | 13.62 |
| 4    | 12    | 18.16 |
| 5    | 7     | 22.70 |

Luminous flux luminaire  
603 lm

## Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 80         |
| Extreme cut off    | No         |

## Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable DALI 1   |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



## Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)