

FLOS

F015D22D018 Deep Brown

Mile Wall 2 Asymmetric Down Dimmable DALI

Designed by Antonio Citterio, 2020




8W - 603lm - 2700K - CRI> 80

LED light source included. Integrated 220-240V ON/OFF and 1-10V or DALI dimmable electrical power. Equipped with double cable gland for electrical connection.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|------------------------|---------------|
| EAN | 8054793226811 |
| Mounting | Wall |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| Power (W) | 8 |
| System power (W) | 7.8 |
| Lumen Output (lm) | 603 |

Physical

| | |
|---------------------|------------|
| Colour | Deep Brown |
| Orientation | Fixed |
| Net weight (kg) | 1.08 |
| Package height (mm) | 80 |
| Package width (mm) | 100 |
| Package length (mm) | 245 |
| IP internal | 65 |
| Drive Over | No |

Download

[Mounting instructions](#) ZIP

Photometric Files

[LDT / IES](#) ZIP

Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



Schematic light drawing



| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 187 | 4.54 |
| 2 | 47 | 9.08 |
| 3 | 21 | 13.62 |
| 4 | 12 | 18.16 |
| 5 | 7 | 22.70 |

Luminous flux luminaire
603 lm

Photometric


| | |
|--------------------|------------|
| Lighting type | Direct |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 80 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|-------------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Dimmable | Yes |
| Power supply type | Dimmable DALI 1 |
| Dimming interface | Dimmer Integrated |
| Emergency | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

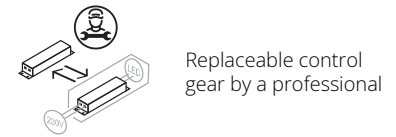

Accessories & Power Supply



OPTIONAL
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION
DEVICE)