


# FLOS

 F0280000 Black

## Noctambule Suspension 4 High Cylinder


Designed by Konstantin Grcic, 2019

45W - 1500lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

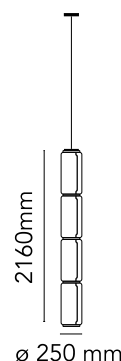

### Main specifications

EAN	8059607000755
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
Lumen Output (lm)	1500

### Physical

Colour	Black
Length (mm)	250
Cord colour	Black
Canopy colour	Black
Canopy length/diameter (mm)	187
Canopy height (mm)	45
Net weight (kg)	18.9
Package volume (m3)	0.33
IP internal	20

### Download

Mounting instructions	<a href="#">Download PDF</a>
Mounting instructions	<a href="#">Download PDF</a>
Mounting instructions	<a href="#">Download PDF</a>

### Photometric Files


LDT / IES	<a href="#">Download ZIP</a>
-----------	------------------------------

### Technical Drawings

3D	<a href="#">Download ZIP</a>
Bim	<a href="#">Download ZIP</a>



Schematic light drawing



Photometric





Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy  
Labelling


This product contains a light  
source of energy efficiency  
class E



Replaceable (LED only)  
light source by a  
professional

Replaceable control  
gear by a professional

Spare Parts

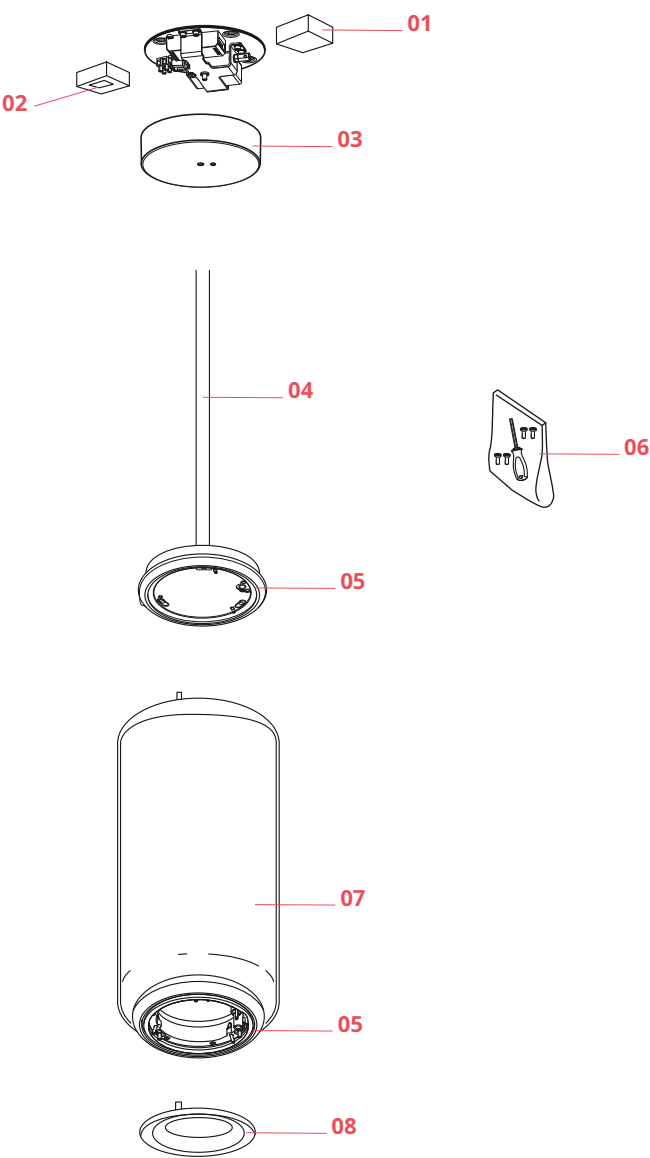

- |     |  |           |
|-----|--|-----------|
| 00. | Push button and cables assembly for dimmer           | RF27318   |
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit                                       | RF34197   |
| 03. | Noctambule ceiling rose cover                        | RF27422   |
| 04. | Noctambule Suspension attack                         | F0253030  |
| 05. | Ring led diffuser                                    | RF27498   |
| 06. | Fixing screws kit                                    | RF0254100 |
| 07. | Noctambule High Cylinder                             | F0257000  |
| 08. | Noctambule Suspension Terminal ring                  | F0258030  |



RF27318  
Push button and cables assembly  
for dimmer



RF0410500  
Power supply kit for  
Arrangements small &  
Noctambule



RF34197  
Led dimmer kit



RF27422  
Noctambule ceiling rose cover



F0253030  
Noctambule Suspension attack



RF27498  
Ring led diffuser



RF0254100  
Fixing screws kit



F0257000  
Noctambule High Cylinder



F0258030

Noctambule Suspension Terminal  
ring