


FLOS

09.8302.DR Matte Anthracite


Oblique

Designed by Vincent Van Duysen, 2020

LED - Top LED - 8W - 525lm - 4000K - CRI> 90 - Beam° 35

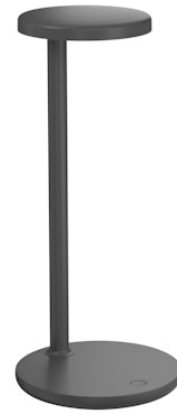

Oblique is the natural evolution of the classic office swing arm model. With its robust, compact structure and minimalist design, Oblique produces a patented, powerful, and controlled asymmetric light beam that is optimal for workspaces. Key features: Integrated USB-C port into the base to charge additional devices. Round flat head for minimal visual intrusion with a 355 rotatable stem. A patented ultra-flat lens with very high efficiency of 97%. Only the Oblique Qi version comes with a built-in wireless charging port at the base. It allows users to charge their smartphones while freeing desks from unsightly wire and cable clutter.

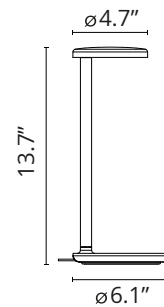

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Table |
| Environments | Indoor dry location |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | Top LED |
| Lamp category | LED |
| Number of lamps | 1 |
| Power (W) | 8 |
| System power (W) | 18 |
| Source flux (lm) | 827 |
| System flux (lm) | 525 |

Physical

| | |
|-------------|------------------|
| Color | Matte Anthracite |
| Orientation | Fixed |
| IP internal | 20 |
| IP external | 20 |

Download

[Family spec sheet](#) ZIP

[Mounting instructions](#) PDF


Photometric Files

[LDT / IES](#) ZIP


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



| | | |
|-------------|-------|-------|
| Beam Angle: | 35° | |
| h(m) | E(lx) | D(m) |
| 1 | 252 | 2.18 |
| 2 | 63 | 4.36 |
| 3 | 28 | 6.54 |
| 4 | 16 | 8.72 |
| 5 | 10 | 10.90 |

Luminous flux luminaire
525 lm

Photometric

| | |
|--------------------------|-------------------------------|
| Lighting type | Direct |
| Light distribution | Asymmetric |
| CCT (K) | 4000 |
| CRI> | 90 |
| LED Life / Failure Ratio | L90B10 > 50.000h (Tc=85°C) |
| Beam angle C0-180 (°) | 35 |
| Beam angle C90-270 (°) | 46 |

Electrical

| | |
|---------------------------|-----------------|
| Insulation class | III |
| Driver | Remote included |
| Dimmable | Yes |
| Dimming type | Dimmable |
| Emergency type | No |
| Induction recharge Qi | No |
| Charging socket/connector | USB-C |