

# FLOS

F4640009 White


**OK**

Designed by Konstantin Grcic, 2014

18W - 1551lm - 2700K



A pendant light that feels as at home in an industrial space as it would in museum exhibit: The OK Light by German Designer Konstantin Grcic plays with expectations to provide functional light that is surprising and easily directed. It features an ultra-flat LED surface with edge-lighting technology that can be directed over 360 degrees. The electronic components are housed in a small rectangular box that slides vertically over the metal wire of the lamp, which is balanced by a cone-shaped counterweight. The OK Light features a soft-touch switch.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

## Main specifications

EAN	8059607005057
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	18
System flux (lm)	1551

## Physical

Color	White
Length (in)	7.87
Cord color	Black
Cord length (in)	157.480
Canopy color	White
Canopy height (in)	0.787
Net weight (lb)	6.44
Gross weight (lb)	9.08
Package height (in)	5.51
Package width (in)	13.39
Package length (in)	15.35
Package volume (in)	1132.85
IP internal	20

## Download

[Mounting instructions](#) [↓ PDF](#)

[Mounting instructions](#) [↓ PDF](#)

## Photometric Files

[LDT / IES](#) [↓ LDT](#)


## Technical Drawings

[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)



## Schematic light drawing




Beam Angle: 61°

h(m)	E(lx)	D(m)
1	1158	1.19
2	289	2.38
3	129	3.57
4	72	4.76
5	46	5.95

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

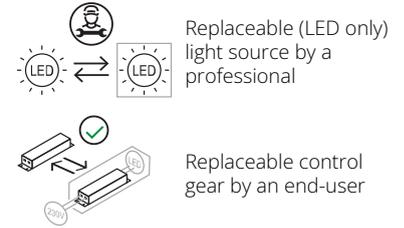


## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

## Spare Parts

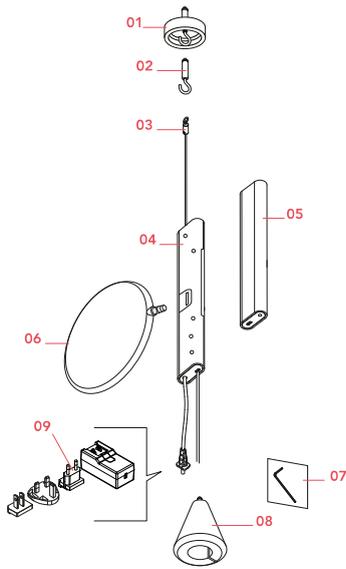

- |     |                                      |           |
|-----|--------------------------------------|-----------|
| 02. | Ok Anchor with hook                  | RF4640100 |
| 03. | Ok Steel cable 4mt.                  | RF4640200 |
| 03. | Ok Steel cable 6mt.                  | RF4640300 |
| 04. | Ok Internal lamp body assembly       | RF4640400 |
| 06. | Ok White led head assembly           | RF28253   |
| 08. | Ok Counterweight                     | RF23023   |
| 09. | Black plug assembly kit & 24V driver | RF6600230 |



RF4640100

Ok Anchor with hook



RF4640200

Ok Steel cable 4mt.



RF4640300

Ok Steel cable 6mt.



RF4640400

Ok Internal lamp body assembly



RF28253

Ok White led head assembly



RF23023

Ok Counterweight



RF6600230

Black plug assembly kit & 24V driver