

Outgraze 50 Easy L 300 mm Tunable White DALI White

Designed by FLOS Outdoor



24V remote power supply and installation brackets to be ordered separately.
Sandblasted glass.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN 8054793798172

Physical

Colour	White
Orientation	Adjustable
Net weight (kg)	1.16
Package height (mm)	970
Package width (mm)	120
Package length (mm)	120
Package volume (m3)	0.01

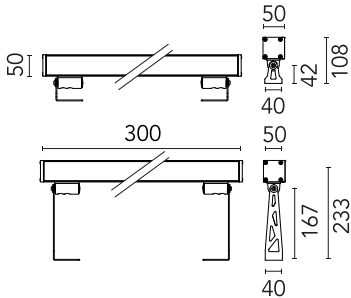

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)

3D [ZIP](#)

[Bim](#) [ZIP](#)



Photometric

Beam angle C0-180 (°)	100
Beam angle C90-270 (°)	100

Electrical

Emergency No

Notes

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.
