

FLOS


FA52503206 Grey

Perseo 2 Opal

Designed by FLOS Outdoor, 2012



LED source included. Integrated electrical power supply 220-240V ON- OFF. Fixing bracket included. Equipped with a 700 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Optional accessories: ground spike; feet for ground mounting and arms for wall mounting (IP68 connector included). Frosted glass.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|----------------------|
| EAN | 8054793641621 |
| Mounting | Wall, Ground |
| Environments | Outdoor wet location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| System power (W) | 11 |
| Source flux (lm) | 1258 |
| Lumen Output (lm) | 655 |

Physical

| | |
|--------------------------|------------|
| Colour | Grey |
| Orientation | Adjustable |
| Longitudinal tilting (°) | 200 |
| Net weight (kg) | 0.97 |
| Package height (mm) | 85 |
| Package width (mm) | 140 |
| Package length (mm) | 235 |
| IP internal | 65 |

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 4000 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 88 |
| Beam angle C90-270 (°) | 100 |
| Extreme cut off | No |

Electrical


| | |
|--------------------|--------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Dimmable | No |
| Power supply type | Non Dimmable |
| Dimming interface | Not Dimmable |
| Emergency | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

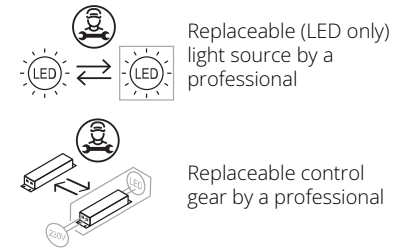

Accessories & Power Supply



OPTIONAL
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

FA136

Ground Spike Aimer 1/Aimer
2/Aimer 3/Perseo 2



OPTIONAL
Accessory

FA182

Base Plate and Fixing Bolts
Perseo 2



OPTIONAL
Accessory

FA17806

Pole with base Perseo 2 h 800
mm



OPTIONAL
Accessory

FA17706

Pole with base Perseo 2 h 500
mm



OPTIONAL
Accessory

FA16206

Wall Bracket/Pole 600 mm Perseo
2



OPTIONAL
Accessory

FA16106

Wall Bracket/Pole 300 mm Perseo
2