


# FLOS



FA533444-300 Forest Green/Oliva Green

## Platter 410 Dimmable Dali


Designed by FLOS Outdoor, 2013

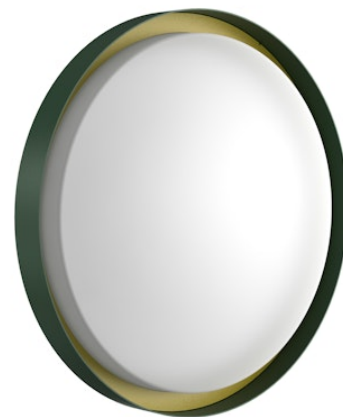

LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. With IP65 cable guide for rubber cables 5mm<ø<10mm and a 2-pole connection box for a fast connection. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793666648 |
| Mounting               | Ceiling, Wall |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | Power LED     |
| Number of lamps        | 1             |
| System power (W)       | 34            |
| Source flux (lm)       | 4152          |
| Lumen Output (lm)      | 2712          |

### Physical

|                     |                          |
|---------------------|--------------------------|
| Colour              | Forest Green/Oliva Green |
| Orientation         | Fixed                    |
| Net weight (kg)     | 3.73                     |
| Package height (mm) | 120                      |
| Package width (mm)  | 520                      |
| Package length (mm) | 520                      |
| Package volume (m3) | 0.03                     |
| IP internal         | 66                       |

### Download

Mounting instructions [↓ ZIP](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 120       |
| Beam angle C90-270 (°) | 120       |
| Extreme cut off        | No        |

Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable DALI 1   |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)