

FLOS

06.2600.14 Black

Profile 1000mm Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

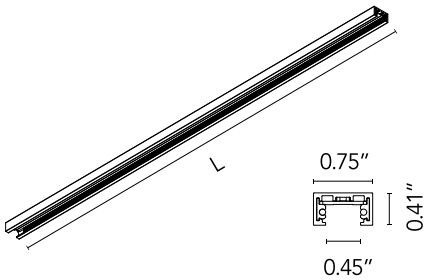

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Connector
Electrical

06.2606.14
Live End Feed Dimmable



REQUIRED
Connector
Electrical


06.2607.14
Linear Connector Feed Dimmable




REQUIRED
Corner
06.2610.14
Inner Corner




REQUIRED
Corner
06.2609.14
90° Corner Feed Dimmable




REQUIRED
Power supply
06.2623.14
Power Supply Surface Middle
Dimmable / Non Dimmable



REQUIRED
Power supply
06.2622.14
Power Supply Surface End
Dimmable / Non Dimmable



REQUIRED
Component
Installation
06.2617.14
Blind End



OPTIONAL
Power supply
Electrical
08.0613.14A
Dimmable control box 1-10V,
24/48V. For remote installation.



OPTIONAL Connector

Electrical

06.2608.14

Straight Connector