

# FLOS

06.2645.14 Black

## Profile 3000mm Non Dimmable

Designed by FLOS Architectural, 2024




Recessed

Interior electromechanical recessed profile (24Vdc) from 1 to 3m long for wall or ceiling installation. Request power connectors, intermediate connectors, and covers separately. Unit joints available in L, T, and X shapes in the same plane. Also includes a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

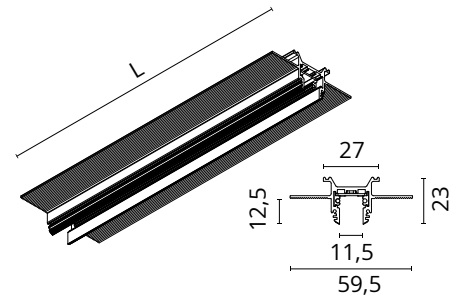

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Recessed            |
| Environments           | Indoor dry location |
| Light sources included | No                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Black |
| Trim                | No    |
| Field cuttable      | Yes   |
| Recessed depth (mm) | 23    |
| Net weight (kg)     | 1     |
| IP internal         | 20    |

### Download

[Mounting instructions](#)

[PDF](#)



## Photometric

Extreme cut off No

## Electrical

|                     |              |
|---------------------|--------------|
| Insulation class    | III          |
| Forward voltage (V) | 24           |
| Power supply        | Remote       |
| Dimmable            | No           |
| Power supply type   | Non Dimmable |
| Batteries inside    | No           |

## Accessories & Power Supply




REQUIRED  
Power supply

Electrical

60.9352

LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.



REQUIRED  
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V, 24/48V. For remote installation.



REQUIRED  
Power supply

Electrical

60.9777A

Remote Power Supply Non Dimmable 24V. 120W. 220/240V



REQUIRED  
Connector

Electrical

06.0456.14

Live end Feed



REQUIRED  
Component

Mounting

06.0461.14

Blind End



REQUIRED  
Power supply

Electrical

60.9705A

Remote Power Supply Non Dimmable 24V. 60W. 220/240V



OPTIONAL  
Corner

Electrical

06.0458.14

Inner Corner



OPTIONAL  
Corner

Electrical

06.0457.14

90° Corner



OPTIONAL  
Corner

Electrical

06.0459.14

T Connector



OPTIONAL  
Corner

Electrical

06.0460.14

X Connector



OPTIONAL  
Connector

Electrical

06.2608.14

Straight Connector