FLOS

06.0622.ES Brushed Bronze

# Profile Feed Casambi 1000mm

Designed by FLOS Architectural

Length: 1000 - Suspension

Profil électromécanique intérieur (24 Vdc) de 1 à 3 m de longueur pour installation suspendue avec éclairage indirect sur la partie supérieure. Les profils linéaires sont disponibles en deux versions : profils d'alimentation, pour connexion au driver, et profils intermédiaires. Les angles ne comportent pas d'éclairage indirect. Les connecteurs d'alimentation, les connecteurs intermédiaires et les embouts doivent être commandés séparément. Des jonctions mécaniques et électriques sont disponibles en version linéaire ainsi qu'en formes L, T et X dans le même plan.

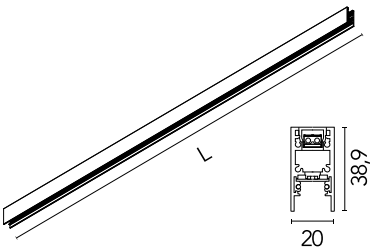


Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

## Main specifications

| | |
|---|---|
| Mounting | Suspension |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Top LED |
| Lamp category | LED |
| Number of lamps | 1 |
| Power (W) | 5.6 |
| Source flux (lm) | 691 |
| Lumen Output (lm) | 496 |
| Efficacy (lm/W) | 88 |

## Physical

| | |
|---|---|
| Colour | Brushed Bronze |
| Length (mm) | 1000 |
| Net weight (kg) | 0.82 |
| IP internal | 20 |

## Download

Mounting instructions PDF

## Photometric Files

LDT / IES ZIP

## Technical Drawings

2D ZIP

3D ZIP



©2026 Flos - P.IVA 00290820174 - 3/13/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Schematic light drawing




Luminous flux luminaire
496 lm

Beam Angle: 85°

| h(m) | E(lx) | D(m) |
|---|---|---|
| 1 | 222 | 1.85 |
| 2 | 55 | 3.70 |
| 3 | 25 | 5.55 |
| 4 | 14 | 7.39 |
| 5 | 9 | 9.24 |

## Photometric

| | |
|---|---|
| Lighting type | Indirect |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 90 |
| McAdam steps (SDCM) | 3 |
| Rf fidelity index | 91 |
| Rg gamut index | 100 |
| LED Life / Failure Ratio | L80B10>72.000h_Tc65ºC |
| Beam angle C0-180 (º) | 85 |
| Beam angle C90-270 (º) | 96 |
| Extreme cut off | No |
| $UGR_L$ | <10 |

## Electrical

| | |
|---|---|
| Insulation class | III |
| Forward voltage (V) | 24 |
| LED current (mA) | 220 |
| Power supply | Remote |
| Dimmable | No |
| Dimming range (%) | 1-100 |
| Batteries inside | No |



©2026 Flos - P.IVA 00290820174 - 3/13/2026


In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Accessories & Power Supply

REQUIRED
Power supply

Electrical

08.1231.ES

Remote Kit Dimmable

REQUIRED
Accessory

Mounting

06.0672.00

Initial Electrical Kit

REQUIRED
Accessory

Mounting

06.0673.00

Intermediate Electrical Kit

REQUIRED
Power supply

Electrical

08.1237.ES

Remote Kit Dimmable

REQUIRED
Power supply

Electrical

08.1239.ES

Remote Kit Dimmable

REQUIRED
Accessory

Mounting

06.0674.ES

Recessed Mechanical Kit

REQUIRED
Accessory

Mounting

06.0675.00

Surface Mechanical Kit

REQUIRED
Power supply

Electrical

08.1232.14

Surface Kit Initial No Dimmable



©2026 Flos - P.IVA 00290820174 - 3/13/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

REQUIRED
Power supply

Electrical

08.1232.40

Surface Kit Initial No Dimmable

REQUIRED
Accessory

Mounting

06.0671.00

Intermediate Mechanical Kit

REQUIRED
Accessory

Mounting

06.0670.00

Initial Mechanical Kit

REQUIRED
Connector

06.0660.ES

Mechanical linear joint

REQUIRED
Corner

06.0661.ES

Mechanical 90° Corner

REQUIRED
Connector

06.0662.ES

Mechanical T Connector

REQUIRED
Connector

06.0663.ES

Mechanical X Connector

REQUIRED
Connector

06.0664.ES

Electrical linear joint



©2026 Flos - P.IVA 00290820174 - 3/13/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

REQUIRED
Corner

06.0665.ES

Electrical 90° Corner

REQUIRED
Connector

06.0666.ES

Electrical T Connector

REQUIRED
Connector

06.0667.ES

Electrical X Connector

REQUIRED
Component

06.0668.ES

Blind End

OPTIONAL
Connector

Electrical

06.2608.14

Straight Connector

OPTIONAL
Corner

Electrical

06.0457.14

90° Corner

OPTIONAL
Corner

Electrical

06.0459.14

T Connector

OPTIONAL
Corner

Electrical

06.0460.14

X Connector



©2026 Flos - P.IVA 00290820174 - 3/13/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.