

FLOS

06.6034.40 White

Recessed/Surface Feed Connector

Designed by FLOS Architectural, 2020



2m cable included. Electrical connection. Luminaires cannot be located in the connector.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	no
Power (W)	120

Physical

Colour	White
Net weight (kg)	0.06

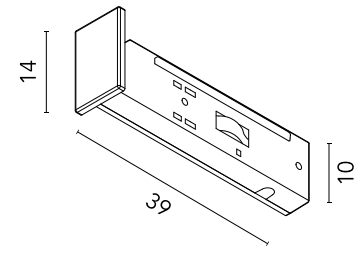

Download

Mounting instructions



Electrical

Insulation class	III
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



OPTIONAL Power supply

Electrical

60.9681

Remote power supply. Dimmable through 0-1/10V protocol. 24V. Dimming range 10-100%



OPTIONAL Power supply

Electrical

60.9683

Remote power supply. Dimmable through Casambi protocol. 24V. Dimming range 10-100%



OPTIONAL Control interface

Electrical

60.9392

Casambi controller. Requires 1-10V or Dali driver. It must be ordered separately