

# FLOS

F6394003 Blue Tourmaline

## Skynest Motion

Designed by Marcel Wanders, Marcel Wanders studio, 2022

57W - 1385lm - 2700-2900K - CRI> 90

Diffuse lighting hanging appliance. The dome is a combination of luminous and dark elements arranged into a network and formed of core structures covered with a thin interwoven colourful tubular mesh made from recycled and recyclable fabric produced from polyester. Every single luminous element is powered by special micro-connectors located at the top of the dome and is covered with a two-tone mesh, while the side facing the inside of the dome is always white in order to allow for optimal light emission from the LED module. The appliance is fitted with a built-in balancing system at the top of the dome which helps adjust its balance, making it perfectly stable. The bottom of the dome is completed by an aluminium ring that keeps the dome's entire network structure in place through a simple snap-fit system. The product is assembled with absolutely no glue so it can be fully separated to be recycled in the future and in case of any repairs or replacements. Available lamp finishes: Blue Tourmaline, Almond, Anthracite or Brick Red. Plastic structure painted with the same finish as the lamp, fitted with built-in electronics and dimmer.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607057193
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	57
System power (W)	57
System flux (lm)	1385

### Physical

Color	Blue Tourmaline
Length (in)	90.55
Cord color	Light Blue
Canopy color	Blue Tourmaline
Canopy height (in)	0.984
Net weight (lb)	13.23
Gross weight (lb)	40.79
Package volume (in)	20039.3
IP internal	20

### Download

Mounting instructions

[PDF](#)

### Photometric Files

LDT / IES

[ZIP](#)

### Technical Drawings

2D


[ZIP](#)

3D

[ZIP](#)



## Schematic light drawing



## Ecodesesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by an end-user



Replaceable control gear by an end-user


## Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700-2900
CRI>	90
Extreme cut off	No

## Electrical

Insulation class	III
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G

## Spare Parts

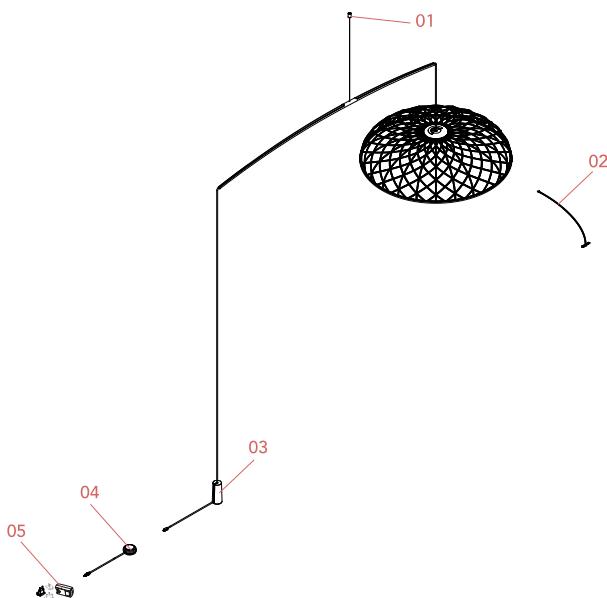

01.	Skynest Motion – Light blue ceiling rose and steel cable assembly	RF6391003
02.	Assembly Led Arm for Skynest Suspension Blue Tourmaline	RF34718
03.	Skynest Motion Light blue counterweight	RF35048
04.	Skynest Motion Light blue emc dimmer assembly	RF37532
05.	Black plug assembly kit & 48V driver	RF6600130

# FLOS

RF6391003

Skynest Motion – Light blue ceiling rose and steel cable assembly



RF34718

Assembly Led Arm for Skynest Suspension Blue Tourmaline



RF35048

Skynest Motion Light blue counterweight



# FLOS

RF37532

Skynest Motion Light blue emc dimmer assembly

RF6600130

Black plug assembly kit & 48V driver