


Skynest Suspension

Designed by Marcel Wanders, 2022

78W - 1944lm - 2700K - CRI> 90

Diffuse lighting hanging appliance. The dome is a combination of luminous and dark elements arranged into a network and formed of core structures covered with a thin interwoven colourful tubular mesh made from recycled and recyclable fabric produced from polyester. Every single luminous element is powered by special micro-connectors located at the top of the dome and is covered with a two-tone mesh, while the side facing the inside of the dome is always white in order to allow for optimal light emission from the LED module. The appliance is fitted with a built-in balancing system at the top of the dome which helps adjust its balance, making it perfectly stable. The bottom of the dome is completed by an aluminium ring that keeps the dome's entire network structure in place through a simple snap-fit system. The product is assembled with absolutely no glue so it can be fully separated to be recycled in the future and in case of any repairs or replacements. Available lamp finishes: Blue Tourmaline, Almond, Anthracite or Brick Red. Plastic ceiling rose painted with the same finish as the lamp, fitted with built-in electronics that allow for the use of different dimmer systems: 0-10V / 1-10V / DALI / PUSH."



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607076446
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	78
System power (W)	78
System flux (lm)	1944

Physical

Color	Almond
Length (in)	35.59
Canopy height (in)	2.008
Net weight (lb)	9.04
Gross weight (lb)	26.45
Package height (in)	9.84
Package width (in)	39.37
Package length (in)	39.37
Package volume (in)	15256
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download DWG](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)


Ecodesign and Energy
Labelling

This product contains a light
source of energy efficiency
class F

Replaceable (LED only)
light source by an end-
user

Replaceable control
gear by a professional

Spare Parts

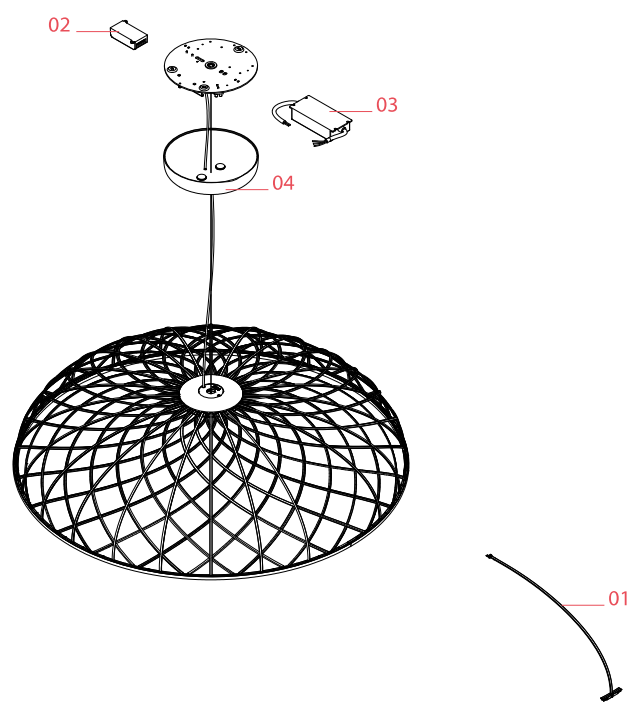

- | | | |
|-----|---|---------|
| 01. | Assembly Led Arm for Skynest Suspension Almond | RF34719 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Skynest Suspension Driver 100W 100-277V | RF33061 |
| 04. | Skynest Suspension Rose with Riveted Magnets Almond | RF34382 |



RF34719
Assembly Led Arm for Skynest
Suspension Almond



RF35452
Led dimmer kit



RF33061
Skynest Suspension Driver 100W
100-277V



RF34382
Skynest Suspension Rose with
Riveted Magnets Almond