

# FLOS


■ FU137130 Glossy Black

## Smithfield Suspension Designed by Jasper Morrison, 2009

Incandescent - 4 x 60W



Smithfield Suspension LED version is now available in two color temperatures 2700K and 3000K. Available in 3500K, please inquiry for more details. Part of the Smithfield family, the Smithfield Suspension manages to be both grand and unassuming in Halogen and new LED versions. Providing direct light through its aluminum body, it is well suited for a variety of environments. Available in black, matte black, mud and white. Its diffuser is injection-molded opalescent PC (polycarbonate). The steel ceiling attachment features a steel suspension cable, and the three-pole electric cable is PTFE double insulation. Inspiration behind the design: Jasper Morrison is known for his ability to take the beauty that he sees in the world around him and translate it into his work. To that end, the Smithfield family was named for the Smithfield Market in London, where the artist was inspired by the industrial nature of the fixtures he saw. "I've always liked the industrial and functional character of these lights," he says. "I wanted to make a project out of them, looking for some way of making use of their efficiency in delivering light, and the forms themselves which are so much a part of the good atmosphere of industrial spaces."



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Download

[Family spec sheet](#)



[Mounting instructions](#)



## Main specifications

EAN	8059607031421
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Light sources included	No
Lamp category	Incandescent
Lamp type	A
Lamp holders	E26
Number of lamps	4
Power (W)	60

## Physical

Color	Glossy Black
Length (in)	23.62
Cord color	Clear
Cord length (in)	106.299
Canopy color	Black
Canopy height (in)	1.417
Net weight (lb)	9.92
Gross weight (lb)	21.16
Package height (in)	27.95
Package width (in)	12.2
Package length (in)	27.95
Package volume (in)	9536.22
IP internal	20



## Photometric

Light distribution	Symmetric
Extreme cut off	No

## Electrical

Insulation class	I
Frequency (Hz)	60
Main voltage (Vac)	120
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Bulbs




NOT INCLUDED

RF34656

9W E26 A19 Led Lamp

## Spare Parts

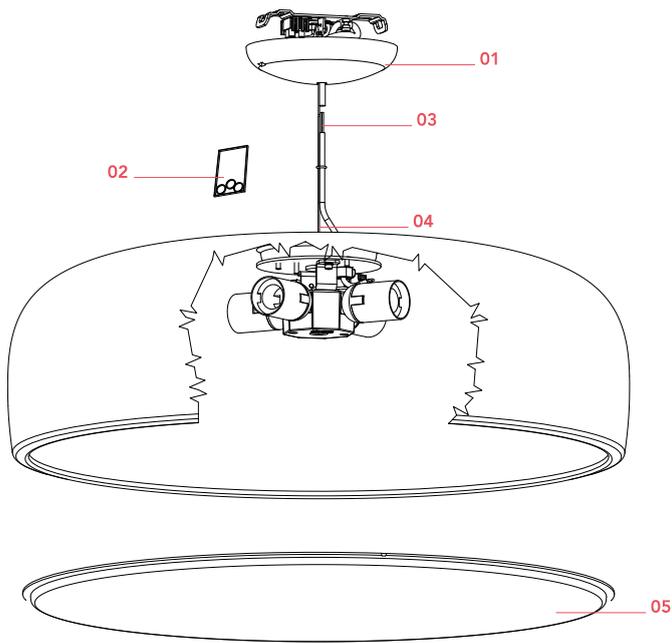

- |     |  |           |
|-----|--|-----------|
| 01. | Black ceiling rose assembly                            | RAU369230 |
| 02. | Kit of 5 or rings                                      | RF05382   |
| 03. | Power Cord for Smithfield                              | RF19342   |
| 04. | 3 mt steel cable $\varnothing$ 1,2 with 19 wined wires | RF29665   |
| 05. | Methacrylate diffuser                                  | RF19022   |



RAU369230

Black ceiling rose assembly



RF05382

Kit of 5 or rings



RF19342

Power Cord for Smithfield



RF29665

3 mt steel cable  $\varnothing$ 1,2 with 19  
winded wires



RF19022

Methacrylate diffuser