

Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable , 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications


EAN	8059607015131
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
Lumen Output (lm)	2791

Physical

Colour	Glossy Black
Length (mm)	600
Cord colour	Clear
Canopy colour	Black
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20

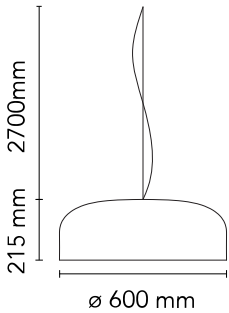

Download


Mounting instructions  PDF

Photometric Files


LDT / IES  LDT

Technical Drawings


2D  ZIP

3D  ZIP

 Bim  ZIP

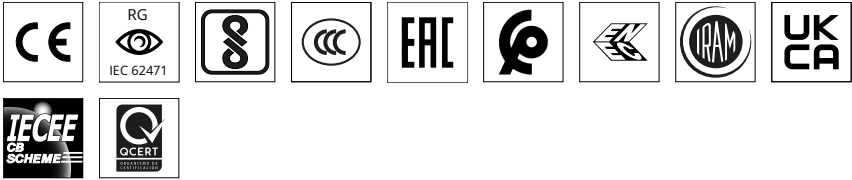

Schematic light drawing



Photometric

Light distribution	Roto symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Spare Parts

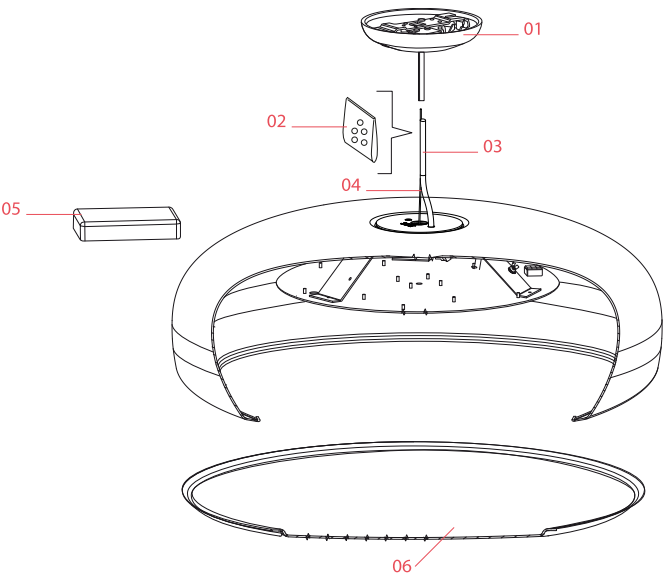

- | | | |
|-----|---|-----------|
| 01. | Black rose assembly | RA3690230 |
| 02. | Kit of 5 or rings | RF05382 |
| 03. | Smithfield Suspension 2,7mt
fep/pvc 5x0,75 transparent cable | RF29934 |
| 04. | 3 mt steel cable ø1,2 with 19
winded wires | RF29665 |
| 05. | Driver 60W 500-1400mA 200-
240V | RF31674 |
| 06. | Methacrylate diffuser | RF19022 |



RA3690230

Black rose assembly



RF05382

Kit of 5 or rings

RF29934

Smithfield Suspension 2,7mt
fep/pvc 5x0,75 transparent cable



RF29665

3 mt steel cable \varnothing 1,2 with 19
winded wires



RF31674

Driver 60W 500-1400mA 200-
240V



RF19022

Methacrylate diffuser