

Smithfield Suspension Pro

Designed by Jasper Morrison, 2009

45W - 2791lm - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, matt black, red, green, white or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700mm.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607014967
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
Lumen Output (lm)	2791

Physical

Colour	Mud
Length (mm)	600
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	Mud
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.9
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20



Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)

Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Power supply type	Dimmable Push
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

<https://professional.flos.com/en/global/product/smithfield-suspension-pro-f1367021/>


F1367021

©2026 Flos - P.IVA 00290820174 - 3/18/2026

professional.flos.com | info@flos.com 2/4

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Spare Parts

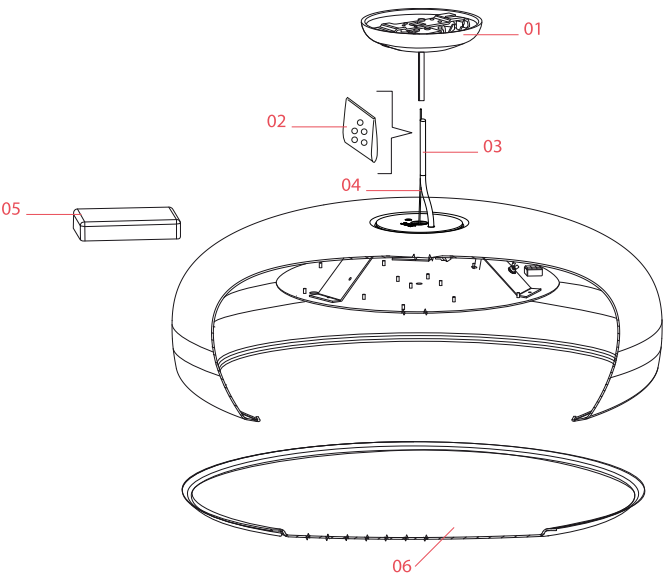

- | | | |
|-----|---|-----------|
| 01. | Smithfield Mud rose assembly | RA3690221 |
| 02. | Kit of 5 or rings | RF05382 |
| 03. | Smithfield Suspension 2,9mt
fep/pvc 5x0,75 transparent cable | RF29934 |
| 04. | 3 mt steel cable ø1,2 with 19
winded wires | RF29665 |
| 05. | Smithfield C/S Power supply 45W
450-1050mA | RF31980 |
| 06. | Methacrylate diffuser | RF19022 |



RA3690221
Smithfield Mud rose assembly



RF05382
Kit of 5 or rings

RF29934
Smithfield Suspension 2,9mt
fep/pvc 5x0,75 transparent cable



RF29665
3 mt steel cable $\varnothing$ 1,2 with 19
winded wires



RF31980
Smithfield C/S Power supply 45W
450-1050mA



RF19022
Methacrylate diffuser