

FLOS

F025A2CA006 Grey

Spine 1 Absolute

Designed by Vincent Van Duysen, 2021




906lm - 2700K - CRI> 80 - Beam° 33

LED COB light source included. Integrated electric power supply 220-240 V ON/OFF. Fixing plate included. The electrical connection is made on the inside of the plate by means of a watertight connector included. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use. Ground spike for ground installations to be ordered separately. Upon request: 1-10 V or DALI dimmable version with 24 Vdc remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

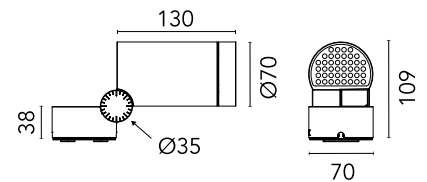

Main specifications

| | |
|------------------------|-----------------------|
| EAN | 8054793418582 |
| Mounting | Ceiling, Wall, Ground |
| Environments | Outdoor wet location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Number of lamps | 1 |
| System power (W) | 11 |
| Source flux (lm) | 1247 |
| Lumen Output (lm) | 906 |

Physical

| | |
|--------------------------|------------|
| Colour | Grey |
| Orientation | Adjustable |
| Rotation (°) | 360 |
| Longitudinal tilting (°) | 270 |
| Cord length (mm) | 330 |
| Net weight (kg) | 1.2 |
| Package height (mm) | 120 |
| Package width (mm) | 120 |
| Package length (mm) | 310 |
| IP internal | 66 |

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 2638 | 0.58 |
| 2 | 660 | 1.17 |
| 3 | 293 | 1.75 |
| 4 | 165 | 2.33 |
| 5 | 106 | 2.92 |

Luminous flux luminaire
906 lm

Photometric


| | |
|------------------------|-----------|
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 33 |
| Beam angle C90-270 (°) | 33 |

Electrical

| | |
|--------------------|--------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Dimmable | No |
| Power supply type | Non Dimmable |
| Dimming interface | Not Dimmable |
| Emergency | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

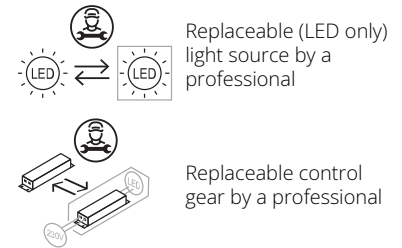

Accessories & Power Supply



OPTIONAL
Accessory

F025Z060000

Honeycomb Louvre



OPTIONAL
Accessory

F026Z010000

Ground Spike