

Spine F 2 Absolute


Designed by Vincent Van Duysen, 2021



LED COB light source included. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Equipped with a 5 m neoprene cable (10 m upon request) for remote connection. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use. The rod for ground installations is available in two sizes and needs to be ordered separately.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

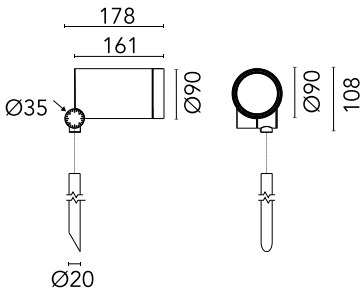

Main specifications

EAN 8054793488905

Physical

Colour	White
Orientation	Adjustable
Net weight (kg)	2.5
Package height (mm)	205
Package width (mm)	290
Package length (mm)	265
Package volume (m3)	0.02

Download

Mounting instructions  ZIP

Photometric Files

LDT / IES  ZIP


Technical Drawings

2D  ZIP

3D  ZIP



Schematic light drawing



Photometric

Beam angle C0-180 (°)	22
Beam angle C90-270 (°)	22
Extreme cut off	No

Electrical

Emergency	No
-----------	----

Notes

5 m neoprene cable (10 m upon request) for remote connection.