

FLOS

F026Q3BD001.A White

Spine L 2 Absolute Dimmable Dali


Designed by Vincent Van Duysen, 2021



LED COB light source integrated. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Minimum L-shaped mounting support integrated. Equipped with a 5 m neoprene cable (10 m upon request) for remote connection. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

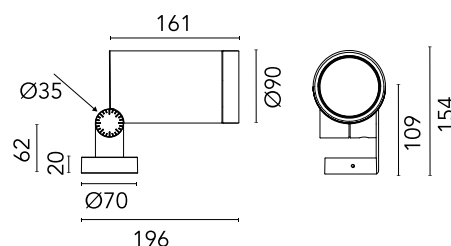

Main specifications

EAN 8054793510507

Physical

Colour White

Orientation Adjustable

Net weight (kg) 2.5

Package height (mm) 205

Package width (mm) 290

Package length (mm) 265

Package volume (m3) 0.02

Download

[Mounting instructions](#) ZIP


Photometric Files

[LDT / IES](#) ZIP


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Beam Angle: 22°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 7517 | 0.38 |
| 2 | 1879 | 0.77 |
| 3 | 835 | 1.15 |
| 4 | 470 | 1.54 |
| 5 | 301 | 1.92 |

Photometric

Beam angle C0-180 (°) 22

Beam angle C90-270 (°) 22

Extreme cut off No

Electrical

Emergency No

Notes

5 m neoprene cable (10 m upon request) for remote connection.
