

# FLOS

■ F026Q3CA030.A Black

## Spine L 2 Absolute


Designed by Vincent Van Duysen, 2021



LED COB light source integrated. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Minimum L-shaped mounting support integrated. Equipped with a 5 m neoprene cable (10 m upon request) for remote connection. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

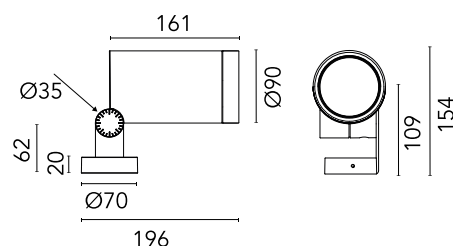

### Main specifications

EAN 8054793510705

### Physical

Colour Black

Orientation Adjustable

Net weight (kg) 2.5

Package height (mm) 205

Package width (mm) 290

Package length (mm) 265

Package volume (m3) 0.02

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 43°

h(m)	E(lx)	D(m)
1	3823	0.80
2	956	1.59
3	425	2.39
4	239	3.19
5	153	3.98

## Photometric

Beam angle C0-180 (°) 43

---

Beam angle C90-270 (°) 43

---

Extreme cut off No

## Electrical

Emergency No

## Notes

5 m neoprene cable (10 m upon request) for remote connection.

---