


# FLOS


FA54100833.A Anthracite

## Spock 2

Designed by FLOS Outdoor, 2013



LED source included. Integrated electrical power supply 220-240V ON/OFF. Fixing bracket included. Equipped with a 1000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Optional IP68 connectors available. The metal nail for ground installation needs to be ordered separately. Optional accessories to regulate the light beam. Dimmable version available upon request.

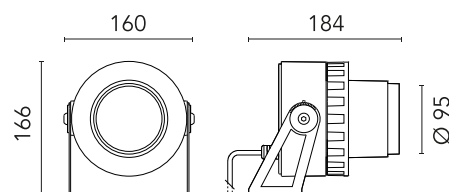

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793688749 |
| Mounting               | Ground        |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | LED array     |
| Number of lamps        | 1             |
| Power (W)              | 24            |
| System power (W)       | 27            |
| Source flux (lm)       | 3249          |
| Lumen Output (lm)      | 2302          |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | Anthracite |
| Orientation              | Adjustable |
| Longitudinal tilting (°) | 270        |
| Net weight (kg)          | 1.8        |
| Package height (mm)      | 235        |
| Package width (mm)       | 180        |
| Package length (mm)      | 185        |
| Package volume (m3)      | 0.01       |
| IP internal              | 66         |

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 20        |
| Beam angle C90-270 (°) | 20        |
| Extreme cut off        | No        |

Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Dimmable version on request