

FLOS

09.0218.14CUF Black

Spot Module LED Array


Designed by FLOS Architectural, 2013



Spotlight to be installed on Light Cut Mini system. Spot modules have integral power supplies which connect via permanently attached cables and are 3-ct track mounted on one or both sides of the cove Spot modules wattage is model dependant 3-ct track is line voltage

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

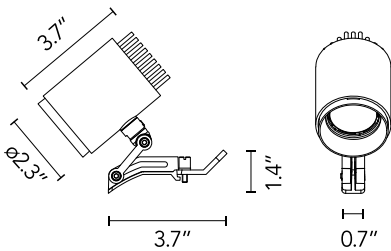

Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	17
Source flux (lm)	1385
System flux (lm)	881

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	350
Longitudinal tilting (°)	180
Net weight (lb)	0.67
Gross weight (lb)	1.22
Package volume (in)	916
IP internal	20

Download


Family spec sheet [ZIP](#)
Mounting instructions [PDF](#)

Photometric Files

LDT / IES [ZIP](#)



Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	29
UGR _L	<16

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120
LED current (mA)	450
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming

Notes

ELV Dimmable. All filters for Power LED version required Filter-holder 08.8363 accessories