

# FLOS

■ F6488030 Black


## String Light - Sphere head - 12mt cable - CASAMBI Ready

Designed by Michael Anastassiades, 2014






21W - 1515lm - 2700K

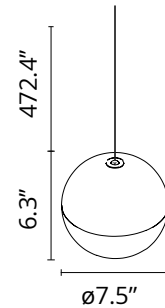A play of graceful light overhead, String Light by Michael Anastassiades adds a streamlined sophistication to your home or office. Providing diffused light, the suspension lamp features a varnished die-cast aluminum body coated with clear soft-touch varnish. The optical diffuser is opal PC (polycarbonate). Based on your selection, each set will come with either a floor base or canopy. Inspiration behind the design: "Every time I take the train, I sit by the window and watch the series of perfectly parallel strings connecting the pylons, as we move at high speed," explains designer Michael Anastassiades. "I love the way they divide the landscape and how spheres are occasionally beaded through the wires at random intervals. I also love how, in Mediterranean cultures, strings of lights are stretched between posts to mark an outdoor space for an evening party in a village square. And finally, I love how human ingenuity works around problems created by everyday things in the house (like switches and power points) that others have chosen to position where we don't want them." Suspension system options with Kevlar reinforced coaxial cable 12 meters (40 ft) 22 meters (72 ft) New Switching Capabilities - 2 versions Soft Touch version: The device can be dimmed by pressing on the cable above the diffuser. Casambi App Control version: The appliance can be dimmed by applying pressure to the cable in the vicinity and by Bluetooth using the FLOS CONTROL application powered by CASAMBI, available for download from the online stores. Installation Refer to the Installation Guide, under the Product Details tab on this page. Contact customer service team for more guidance. This fixture should be relaxed and then re-tightened approximately 24-hours after installation.



### Download

- Mounting instructions  PDF
- Mounting instructions  PDF
- Mounting instructions  PDF

### Photometric Files

- LDT / IES  LDT

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



## Main specifications


EAN	8059607042168
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

## Physical

Color	Black
Length (in)	7.48
Cord color	Black
Cord length (in)	472.441
Net weight (lb)	2.47
Gross weight (lb)	4.41
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20



## Schematic light drawing



## Photometric

Light distribution	Roto symmetric
CCT (K)	2700

## Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimming type	Electronic 48V
Batteries inside	No

## Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

FU648430

Separate Base for String Lights  
Pendant

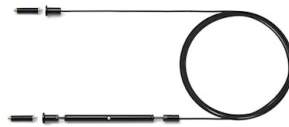


OPTIONAL

F6485030

String Light Kit cable

## Spare Parts

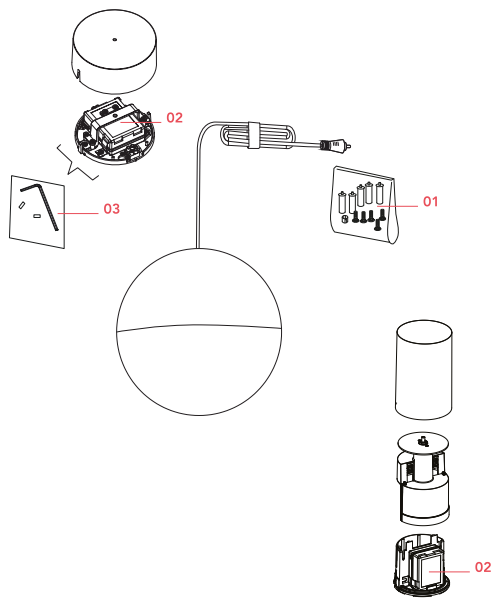

- |     |   |           |
|-----|---|-----------|
| 01. | String Light black hooks & cable clamps 5-unit kit      | RF6480130 |
| 02. | Power supply unit for led                               | RF22934   |
| 03. | Kit with allen key and screws for ceiling rose assembly | RFU648200 |



RF6480130  
String Light black hooks & cable  
clamps 5-unit kit



RF22934  
Power supply unit for led



RFU648200  
Kit with allen key and screws for  
ceiling rose assembly