

FLOS

F6498009 White


String Light - Sphere head - 22mt cable - CASAMBI Ready

Designed by Michael Anastassiades, 2014



21W - 1515lm - 2700K

A play of graceful light overhead, String Light by Michael Anastassiades adds a streamlined sophistication to your home or office. Providing diffused light, the suspension lamp features a varnished die-cast aluminum body coated with clear soft-touch varnish. The optical diffuser is opal PC (polycarbonate). Based on your selection, each set will come with either a floor base or canopy. Inspiration behind the design: "Every time I take the train, I sit by the window and watch the series of perfectly parallel strings connecting the pylons, as we move at high speed," explains designer Michael Anastassiades. "I love the way they divide the landscape and how spheres are occasionally beaded through the wires at random intervals. I also love how, in Mediterranean cultures, strings of lights are stretched between posts to mark an outdoor space for an evening party in a village square. And finally, I love how human ingenuity works around problems created by everyday things in the house (like switches and power points) that others have chosen to position where we don't want them." Suspension system options with Kevlar reinforced coaxial cable 12 meters (40 ft) 22 meters (72 ft) New Switching Capabilities - 2 versions Soft Touch version: The device can be dimmed by pressing on the cable above the diffuser. Casambi App Control version: The appliance can be dimmed by applying pressure to the cable in the vicinity and by Bluetooth using the FLOS CONTROL application powered by CASAMBI, available for download from the online stores. Installation Refer to the Installation Guide, under the Product Details tab on this page. Contact customer service team for more guidance. This fixture should be relaxed and then re-tightened approximately 24-hours after installation.



Download

Mounting instructions [↓ PDF](#)

Mounting instructions [↓ PDF](#)

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607042328
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	866.142
Net weight (lb)	2.8
Gross weight (lb)	4.74
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20



Schematic light drawing



Photometric

Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimming type	Electronic 48V
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

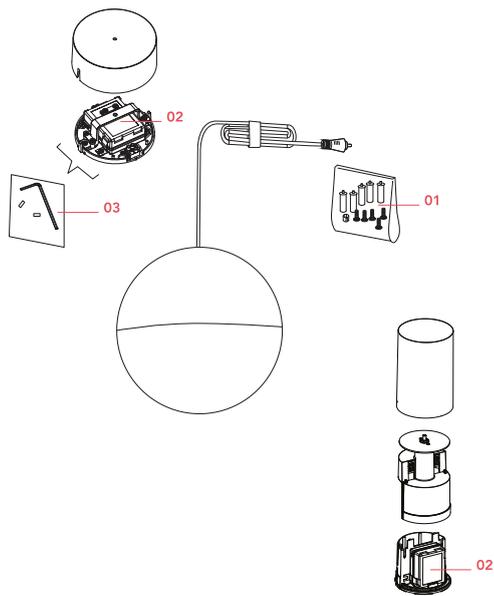

01. String Light Kit with white hooks and white cable clamps RF6480109
02. Power supply unit for led RF22934
03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109
String Light Kit with white hooks
and white cable clamps



RF22934
Power supply unit for led



RFU648200
Kit with allen key and screws for
ceiling rose assembly