

Super Line Pro Down


Designed by FLOS Architectural



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

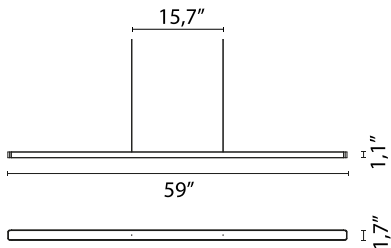

## Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 37.5                |
| System power (W)       | 39                  |
| System flux (lm)       | 3801                |
| Efficacy (lm/W)        | 97.46               |

## Physical

|             |                   |
|-------------|-------------------|
| Color       | Brushed Rose Gold |
| Orientation | Fixed             |
| IP internal | 20                |
| IP external | 20                |

## Download


|                       |                     |
|-----------------------|---------------------|
| Family spec sheet     | <a href="#">ZIP</a> |
| Mounting instructions | <a href="#">PDF</a> |

## Photometric Files


|           |                     |
|-----------|---------------------|
| LDT / IES | <a href="#">ZIP</a> |
|-----------|---------------------|

## Technical Drawings

|    |                     |
|----|---------------------|
| 2D | <a href="#">ZIP</a> |
| 3D | <a href="#">ZIP</a> |

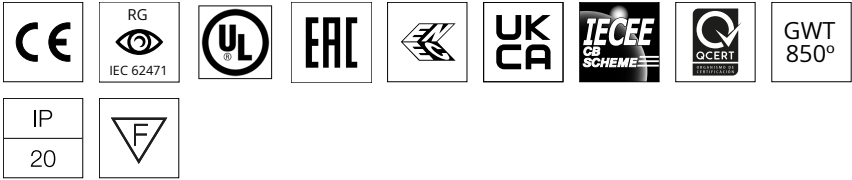

Schematic light drawing



Photometric

|                          |                             |
|--------------------------|-----------------------------|
| Lighting type            | Direct                      |
| Light distribution       | Symmetric                   |
| CCT (K)                  | 3000                        |
| CRI>                     | 90                          |
| McAdam steps (SDCM)      | 3                           |
| LED Life / Failure Ratio | L80B50 - 50.0000h (Tc 85°C) |
| Beam angle C0-180 (°)    | 80                          |
| Beam angle C90-270 (°)   | 80                          |
| Extreme cut off          | No                          |
| UGR <sub>L</sub>         | <19                         |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 35.9                                  |
| LED current (mA)    | 1050                                  |
| Driver              | Remote                                |
| Dimmable            | Yes                                   |
| Dimming type        | Dimmable 0-10V                        |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

### Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED  
Accessory

08.0524.40.19

Super Line Suspension Kit  
accessory for Remote installation,  
White



REQUIRED  
Accessory

08.0524.14.19

Super Line Suspension Kit  
accessory for Remote installation,  
Black



REQUIRED  
Accessory

08.0524.02.19

Super Line Suspension Kit  
accessory for Remote installation,  
Grey



REQUIRED  
Accessory

Installation

08.0524.ET.19

Remote Suspension KIT




REQUIRED  
Accessory

Installation

08.0524.EU.19

Remote Suspension KIT



REQUIRED  
Power supply

Electrical

SP40W1050MA-10V-A02

Remote Splice Box 9.5"x2.5"x1.5",  
1050mA , 40W, 0-10V Dimmable,  
120V/277V