

FLOS

03.9560.ET Brushed Brass

Super Line Pro Up&Down


Designed by FLOS Architectural



LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

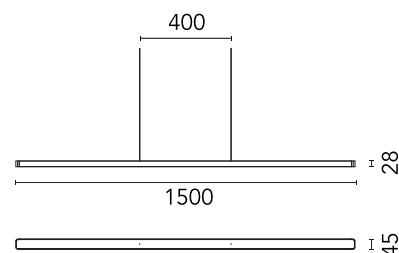

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	58
System power (W)	60
Lumen Output (lm)	5957
Efficacy (lm/W)	99.28

Physical

Colour	Brushed Brass
Orientation	Fixed
Length (mm)	1500
Net weight (kg)	1.45
IP internal	20
IP external	20

Download

Mounting instructions [Download PDF](#)

Photometric Files


LDT / IES [Download ZIP](#)

Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

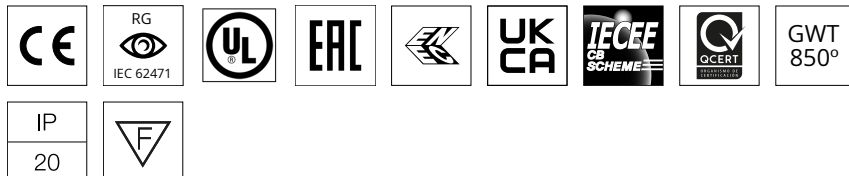

Schematic light drawing



Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Photometric

Lighting type	Direct, Indirect
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 - 50.0000h (Tc 85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
Beam angle indirect C0-180 (°)	110
Beam angle indirect C90-270 (°)	110
Extreme cut off	No
UGR _L	<19


Electrical

Insulation class	III
Forward voltage (V)	69
LED current (mA)	600
Power supply	Remote
Dimmable	Yes
Power supply type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply




REQUIRED
Power supply
Electrical

08.0640.40
Surface Kit. Non Dimmable/Dali
Version




REQUIRED
Power supply
Electrical

08.0640.02
Surface Kit. Non Dimmable/Dali
Version




REQUIRED
Accessory
Installation

08.9077.ET
Interconnection Accessory




REQUIRED
Power supply
Electrical

08.0640.14
Surface Kit. Non Dimmable/Dali
Version




REQUIRED
Power supply
Electrical

08.0641.02
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Power supply
Electrical

08.0641.14
Remote Power Supply Kit. Non
Dimmable/Dali Version




REQUIRED
Power supply
Electrical

08.0641.40
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Power supply
Electrical

08.0642.02
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Accessory
Installation

08.9077.14
Interconnection Accessory



REQUIRED
Power supply
Electrical

08.0641.ET
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Power supply
Electrical

08.0642.EU
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Accessory
Installation

08.9077.40
Interconnection Accessory




REQUIRED
Power supply
Electrical

08.0642.14
Remote Power Supply Kit. Non
Dimmable/Dali Version




REQUIRED
Power supply
Electrical

08.0642.ET
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Accessory
Installation

08.9077.02
Interconnection Accessory



REQUIRED
Accessory
Installation


08.9077.EU
Interconnection Accessory



REQUIRED
Power supply

Electrical


08.0642.40
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Power supply

Electrical


08.0640.ET
Surface Kit. Non Dimmable/Dali
Version



REQUIRED
Power supply

Electrical

08.0641.EU
Remote Power Supply Kit. Non
Dimmable/Dali Version



REQUIRED
Power supply

Electrical

08.0640.EU
Surface Kit. Non Dimmable/Dali
Version