

# FLOS

F6630009 White


## Superloon

Designed by Jasper Morrison, 2015

48W - 2716lm - 2200-2800K



The serene, harmonious glow of the moon inspired this innovative and first-of-its-kind design from designer Jasper Morrison. Using revolutionary Edge Lighting Technology, the Superloon combines maximum performance and efficiency with visual comfort. This striking floor lamp includes a Dim-to-Warm function that responds to adjustments in intensity: As it dims, light transitions from a colder blue to a warmer tone, as with a well-loved filament lamp. The Superloon provides direct light. Its painted or chrome-plated aluminum body features a metal spinning head, die-cast joints, and an extruded stem. The diffuser is silk-screened PMMA (Polymethyl methacrylate). The light source is Edge Lighting, and there is an optical switch sensor on the stem that enables the warm tone dimming function. The stem includes the Soft Touch sensor, which guarantees a fluid and precise control of light flow with a simple and natural touch of the hand. The power cord is 250 centimeters long. There is a plug-in power supply with interchangeable plugs. Inspiration behind the design: It was a few years ago that Piero Gandini introduced Jasper Morrison to the innovative use of LED technology that became known as "Edge Lighting." Morrison was inspired by the way it allowed him to send light sideways and how, when incorporated into the edge of a flat composite disc of translucent white material, it gave the appearance of a flat white disc. "Superloon is the answer to the question of what to do with this intriguing technology," says Morrison. "Mounting the disc on a gyroscopic axis allows the light to be [sent] in infinite directions. The light it gives out is broad and diffused but can be dimmed to a soft glow." Learn more about Superloon here.



### Download

Mounting instructions [↓ PDF](#)

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ LDT](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

## Main specifications


Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	48
System flux (lm)	2716

## Physical


Color	White
Length (in)	29.68
Cord color	Black
Net weight (lb)	24.25
Gross weight (lb)	35.27
Package volume (in)	6683.77
IP internal	20

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



## Schematic light drawing




## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2200-2800
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

## Spare Parts

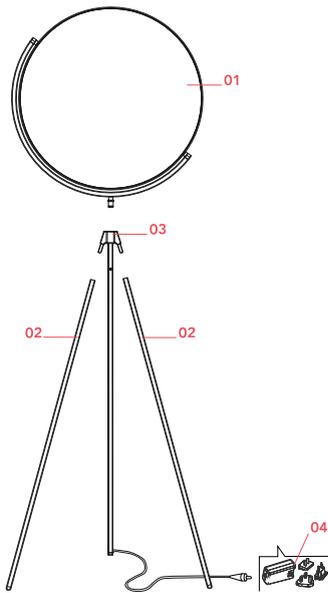

- |     |                                       |           |
|-----|---------------------------------------|-----------|
| 01. | Superloon White diffuser              | F6632009  |
| 02. | Superloon Mobile legs                 | RF25184   |
| 03. | Superloon White electrified fixed leg | RF6630209 |
| 04. | Black plug assembly kit & 48V driver  | RF6600130 |



F6632009

Superloon White diffuser



RF25184

Superloon Mobile legs



RF6630209

Superloon White electrified fixed leg



RF6600130

Black plug assembly kit & 48V driver