

# FLOS

03.8141.40ACB White/White

## Suspension Panel 600 Rod 400 mm Casambi integrated

Designed by Vincent Van Duysen, 2020



Suspended luminaire with rigid rod, to be installed in the Infra-Structure system.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications


Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	40
System power (W)	40

### Physical

Colour	White/White
Trim	No
Orientation	Fixed
Length (mm)	605
Net weight (kg)	5.16
IP internal	20



### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  ZIP

### Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



## Schematic light drawing



## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	113
Beam angle C90-270 (°)	113
Extreme cut off	No

## Electrical

Insulation class	III
Forward voltage (V)	48
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Ecodesign and Energy

### Labelling

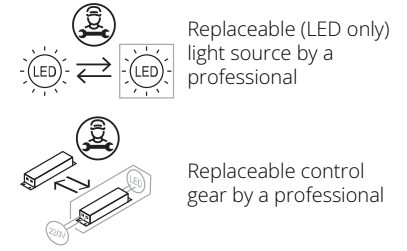

## Notes

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.