

FLOS

03.8141.40ADA White/White

Suspension Panel 600 Rod 400 mm Dali Version

Designed by Vincent Van Duysen, 2017



Suspended luminaire with rigid rod, to be installed in the Infra-Structure system.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	40
System power (W)	40

Physical

Colour	White/White
Trim	No
Orientation	Fixed
Length (mm)	605
Net weight (kg)	5.16
IP internal	20



Download

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) ZIP

Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



Schematic light drawing



Beam Angle: 113°

h(m)	E(lx)	D(m)
1	554	3.05
2	139	6.09
3	62	9.14
4	35	12.19
5	22	15.24

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	113
Beam angle C90-270 (°)	113
Extreme cut off	No

Electrical

Insulation class	III
Forward voltage (V)	48
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable DALI 2
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy

Labelling

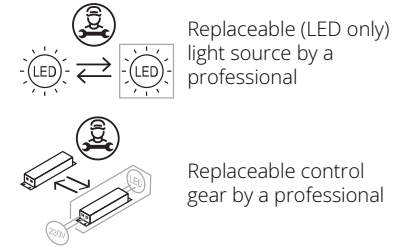

Notes

Only compatible with DALI profile version.