

FLOS

F6564009 White


Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011

9W - 347lm - 2700K - CRI> 90



A brand new edition of the Tab family, now with new capabilities in new colors. This new edition of Tab floor lamp has an adjustable head with a 90-degree rotation capability emitting non-dimmable, direct light. Available in 2 new finishes matte blue and matte dark green as well as the original black and white. Brought to life by the design duo of Edward Barber and Jay Osgerby originally designed in 2011, the Tab floor lamp is a tribute to the spirit of innovation. Lamp body painted with pressofused aluminum. Its multi-led diffuser is specially designed PMMA (Polymethyl methacrylate), created to avoid multi-shadow effect and dazzle. Inspiration behind the design: Designers Edward Barber and Jay Ogersby keep one goal in mind when they begin a creation: Challenge everything. When we are commissioned to design a product, we seek to re-evaluate the archetype, to challenge precedents. We always look at different ways in which products can be manufactured, not necessarily by using new materials or radical re-thinking, but maybe by using existing techniques in a more original or intelligent way.

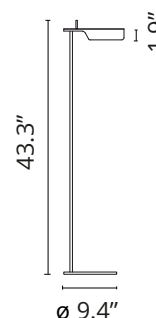

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607031605
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	9
System flux (lm)	347

Physical

Color	White
Length (in)	9.45
Cord color	Black
Net weight (lb)	4.63
Gross weight (lb)	8.82
Package height (in)	6.3
Package width (in)	12.99
Package length (in)	47.64
Package volume (in)	3898.7
IP internal	20

Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling
This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user


Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	No
Dimming type	Electronic 24V
Dimming interface	Switch Integrated (Not Dimmable)
Plug type	Type A, Type C, Type G
Batteries inside	No

Spare Parts

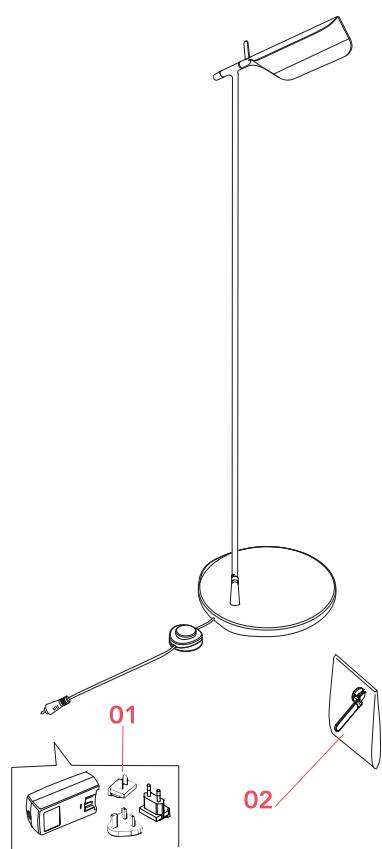

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Black plug assembly kit & 24V driver | RF6600230 |
| 02. | Locking key tool | RF13905 |



RF6600230

Black plug assembly kit & 24V
driver



RF13905

Locking key tool