

FLOS

F6563009 White


Tab Table

Designed by Edward Barber and Jay Osgerby, 2011

9W - 347lm - 2700K - CRI> 80



A brand new edition of the Tab family, now with new capabilities in new colors. This new edition of Tab table lamp has an adjustable head with a 90-degree rotation capability emitting direct light. Features a dimmer switch on cord. Available in two new finishes matte blue and matte dark green, as well as black. Part of the Tab family created by the design duo of E. Barber and J. Osgerby in 2011, the Tab Table lamp is a tribute to the spirit of innovation. Lamp body painted with pressofused aluminum. Its multi-LED diffuser is specially designed PMMA (Polymethyl methacrylate), created to avoid multi-shadow effect and dazzle. Inspiration behind the design: E. Barber and J. Osgerby keep one goal in mind when they begin a creation: Challenge everything. When we are commissioned to design a product, we seek to re-evaluate the archetype, to challenge precedents. We always look at different ways in which products can be manufactured, not necessarily by using new materials or radical re-thinking, but maybe by using existing techniques in a more original or intelligent way.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607031599
Mounting	Table
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	9
System flux (lm)	347

Physical

Color	White
Length (in)	6.89
Cord color	White
Net weight (lb)	2.42
Gross weight (lb)	3.86
Package height (in)	7.48
Package width (in)	12.6
Package length (in)	16.14
Package volume (in)	1521.21
IP internal	20

Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

Photometric Files


LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user


Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	80
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Spare Parts

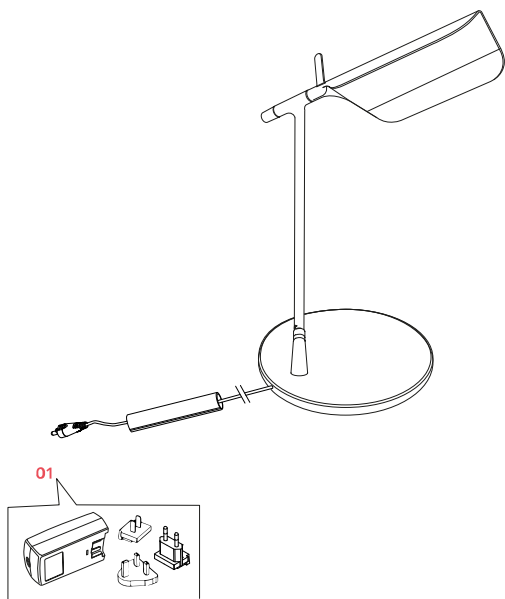

01.
- White plug assembly kit & 24V driver
- RF6600209



RF6600209

White plug assembly kit & 24V
driver