

# FLOS

FA523072 Opal

## Tau Opal L 1554


Designed by FLOS Outdoor



LED light source included. Screw connector at the tube's end. 24V dc remote electric power supply and individual or series feeding cables, to be ordered separately. Adjustable light intensity. Opal polycarbonate diffuser. Adjustable light intensity.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

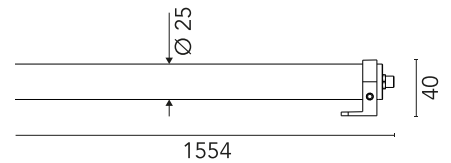

### Main specifications

EAN	8054793640433
Mounting	Ceiling, Wall
Environments	Outdoor wet location
LED type	Power LED
Power (W)	15
System power (W)	15
Source flux (lm)	1260
Lumen Output (lm)	589

### Physical

Colour	Opal
Orientation	Fixed
Net weight (kg)	0.91
Package height (mm)	1600
Package width (mm)	73
Package length (mm)	73
Package volume (m3)	0.01
IP internal	65

### Download

Mounting instructions [↓ ZIP](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)



### Ecodesign and Energy Labelling



## Schematic light drawing



Beam Angle: 110°

h(m)	E(lx)	D(m)
1	200	2.84
2	50	5.69
3	22	8.53
4	13	11.38
5	8	14.22

### Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	100
Beam angle C90-270 (°)	110
Extreme cut off	No

### Electrical

Insulation class	III
Main voltage (Vac)	24
Power supply	Remote excluded
Power supply type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency	No

### Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

## Accessories & Power Supply



REQUIRED  
Accessory

FA172

Supply Cable Tau Tube L 2000  
mm Single Connector



OPTIONAL  
Power supply

F990B21A000

Power supply 17W/110÷240V  
-24Vdc (15W@110V) IP67 Class II  
Selv. Dimmable Push-Dimm Or  
1.10V



OPTIONAL  
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply

F990B28A000

Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply

F990B29A000

Power supply 24Vdc 100W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Accessory

FA173

Supply Cable Tau Tube L 80 mm  
Double Connector



OPTIONAL  
Accessory

FA174

Supply Cable Tau Tube L 200 mm  
Double Connector



OPTIONAL  
Power supply

RF25752

Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



OPTIONAL  
Power supply

RF25750

Power supply 24Vdc 17W / 110-  
240V (15W@110V) IP20 Class II  
selv. Dimmable Push-Dimm Or  
1.10V