


## The Glowing Track Suspension Casambi

Designed by FLOS Architectural, 2025

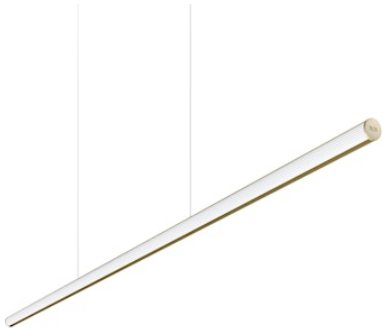


### Suspension

Suspended lighting system that combines ambient lighting with a track that allows the installation of a wide range of projectors and accent lighting modules. Available in three lengths (1200 mm, 1800 mm, and 2400 mm). Driver not included (Accessory kit for remote or surface driver).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 51.1                |
| Source flux (lm)       | 5636                |
| System flux (lm)       | 3492                |
| Efficacy (lm/W)        | 70                  |

### Physical

|             |                |
|-------------|----------------|
| Color       | Brushed Bronze |
| Orientation | Fixed          |
| Cord color  | Transparent    |

### Download

|                       |     |
|-----------------------|-----|
| Family spec sheet     | ZIP |
| Mounting instructions | PDF |

### Photometric Files


|           |     |
|-----------|-----|
| LDT / IES | ZIP |
|-----------|-----|

### Technical Drawings

|    |     |
|----|-----|
| 2D | ZIP |
| 3D | ZIP |



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only)  
light source by a  
professional

Replaceable control  
gear by a professional

Photometric

|                          |                       |
|--------------------------|-----------------------|
| Lighting type            | Total                 |
| Light distribution       | Symmetric             |
| CCT (K)                  | 2700                  |
| CRI>                     | 90                    |
| Rf fidelity index        | 87                    |
| Rg gamut index           | 104                   |
| LED Life / Failure Ratio | L80B10>72.000h_Tc65°C |
| Extreme cut off          | No                    |

Electrical

|                     |                                             |
|---------------------|---------------------------------------------|
| Forward voltage (V) | 24                                          |
| Driver              | Remote                                      |
| Dimmable            | Yes                                         |
| Dimming type        | Dimmable Casambi                            |
| Dimming range (%)   | 1-100                                       |
| Dimming interface   | Remote Dimmable<br>(Dimmer Not<br>Included) |
| Batteries inside    | No                                          |

Accessories & Power Supply



REQUIRED  
Power supply

08.1067.40  
Ceiling Mounted Power Supply  
Box for The Glowing Track  
Suspension



REQUIRED  
Power supply

08.1069.40  
Ceiling Mounted Power Supply  
Box for The Glowing Track 360  
Suspension/Blind



REQUIRED  
Accessory

08.1063.14  
Surface Canopy



REQUIRED  
Power supply

08.1068.40  
Ceiling Mounted Power Supply  
Box for The Glowing Track 360  
Suspension/Blind



REQUIRED  
Accessory

08.1063.40  
Surface Canopy



REQUIRED  
Accessory

08.1064.14  
Recessed Cover Plate



REQUIRED  
Power supply

08.1067.14  
Ceiling Mounted Power Supply  
Box for The Glowing Track  
Suspension



REQUIRED  
Power supply

08.1068.14  
Ceiling Mounted Power Supply  
Box for The Glowing Track 360  
Suspension/Blind



REQUIRED  
Power supply

08.1066.40

Ceiling Mounted Power Supply  
Box for The Glowing Track  
Suspension



REQUIRED  
Power supply

08.1069.14

Ceiling Mounted Power Supply  
Box for The Glowing Track 360  
Suspension/Blind



REQUIRED  
Power supply

LEDSB96W24V-NDM-D1

LED Driver, 96W 24V Non-  
Dimmable



REQUIRED  
Accessory

08.1064.40

Recessed Cover Plate



REQUIRED  
Accessory

08.1065.14

Mini Recessed Canopy



REQUIRED  
Accessory

08.1065.40

Mini Recessed Canopy



REQUIRED  
Power supply

08.1066.14

Ceiling Mounted Power Supply  
Box for The Glowing Track  
Suspension



OPTIONAL  
Connector

08.1206.ES

Corner Joint 2  
Suspension/Surface



OPTIONAL  
Connector

08.1207.ES

Corner Joint 3  
Suspension/Surface



OPTIONAL  
Connector

08.1208.ES

Corner Joint 4  
Suspension/Surface



OPTIONAL  
Connector

08.1213.ES

Linear Joint Suspension