


The Micro Running Magnet Recessed Profile

Designed by FLOS Architectural, 2020

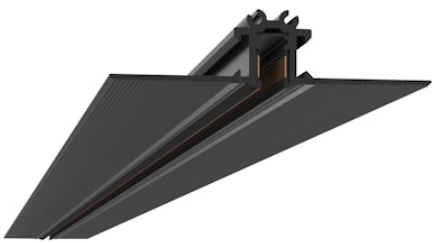


Length: 39.38 - Wall recessed, Ceiling recessed

Electromechanical profile of reduced size for recessed installation in plasterboard ceilings/walls with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

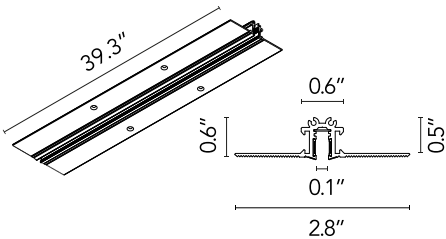

Main specifications

Mounting	Wall recessed, Ceiling recessed
Environments	Indoor dry location
Light sources included	No
Power (W)	120

Physical

Color	Black
Length (in)	39.38
Net weight (lb)	1.06
Gross weight (lb)	2.34
IP internal	20

Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)



Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Installation

06.6034.14
Recessed/Surface Feed
Connector



REQUIRED
Installation

06.6036.14
Recessed/Surface End Caps. 1
unit kit



REQUIRED
Power supply
Electrical

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-
Dimming, 120-277V



REQUIRED
Power supply
LEDSB96W24V-NDM-D01

LED Driver, 24VDC, 96W, Non-
Dimming, 120-277V



OPTIONAL
Corner
Installation

06.6030.14
90° Corner. Electrical/mechanical
connection



OPTIONAL
Corner
Installation

06.6032.14
Inner corner.
Electrical/mechanical connection



OPTIONAL
Installation

06.6035.14
Recessed/Surface Intermediate
Connector