

The Micro Running Magnet Surface Profile

Designed by FLOS Architectural, 2020



Length: 39.38 - Wall surface, Ceiling surface

'Electromechanical profile of reduced size for installation on surfaces (ceiling or wall) with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No
Power (W)	120

Physical

Color	Black
Length (in)	39.38
Net weight (lb)	0.36
Gross weight (lb)	0.69
IP internal	20

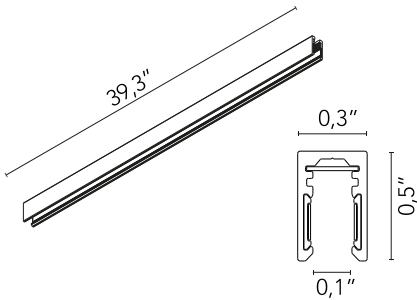

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
ACCESSORYTYPE2

06.6034.14
Recessed/Surface Feed
Connector



REQUIRED
ACCESSORYTYPE2

06.6036.14
Recessed/Surface End Caps. 1
unit kit



REQUIRED
Power supply
ACCESSORYTYPE1

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-
Dimming, 120-277V



REQUIRED
Power supply
LEDSB96W24V-NDM-D01

LED Driver, 24VDC, 96W, Non-
Dimming, 120-277V



OPTIONAL
Corner
ACCESSORYTYPE2

06.6031.14
Surface 90° Corner. Electrical /
Mechanical Joint



OPTIONAL
Corner
ACCESSORYTYPE2

06.6033.14
Surface Inner Corner. Electrical /
Mechanical Joint



OPTIONAL
ACCESSORYTYPE2

06.6035.14
Recessed/Surface Intermediate
Connector