



The Running Magnet Kit 4 - Recessed Version Light Stripe JA8 Black

Designed by FLOS Architectural, 2016

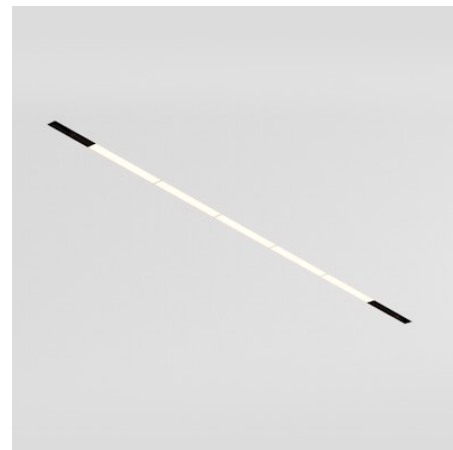

LED - Top LED - 5 x 7.5W - 5 x 416lm - 2700K - CRI> 90 - Beam° 105

Fun with magnets and light. Simultaneously graphic and subtle, the Running Magnet is flexible, precise, and as creative as you. It is track lighting redesigned and elegantly refined. Light elements snap in place and connect automatically through the magic of magnets. Extruded aluminum housings create a clean 1-3/8-inch slot and preconfigured corners complete the system that can run up, around and across walls and ceilings. Finishes align perfectly, always, because Running Magnet can be easily cut on site (except Suspension Up&Down). Linear LED and accent fixtures, available in a variety of sizes, can be exchanged and repositioned quickly, without tools, with artistic results. The Running Magnet is perfect for retail displays where frequent changes are typical and absolute performance is mandatory.

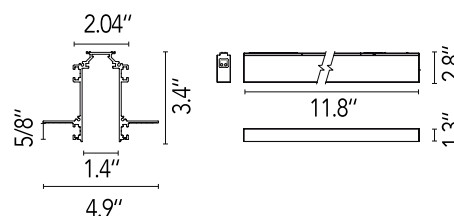

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Wall recessed, Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	5
Power (W)	7.5
Source flux (lm)	618
System flux (lm)	416
Efficacy (lm/W)	56

Physical

Color	Black
Trim	No
Orientation	Fixed
IP internal	20

Download

Family spec sheet [↓ ZIP](#)
Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Ecodesign and Energy Labelling

 Replaceable (LED only)
light source by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50>50.000h (Tc=85°C)
Beam angle C0-180 (°)	105
Beam angle C90-270 (°)	105
Extreme cut off	No

Electrical

Frequency (Hz)	50/60
Forward voltage (V)	24
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming range (%)	10-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Precabled	No

Notes

EC to supply site cabling from driver to track location and site UL listed enclosure.

All components required for the installation are included with the system with the exception of 0-10V control.

The only permissible light modules compatible with JA8 are those specifically included in the Kit.

3000K, 3500K, 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Class 2