

The Tracking Magnet Surface Power Supply Profile Casambi / Dali / 1-10V compatible



Power Supply Surface Profile. 48V/250W. 220-240 Vac.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Power (W)	250

Physical

Colour	Black
Net weight (kg)	1.2
IP internal	20

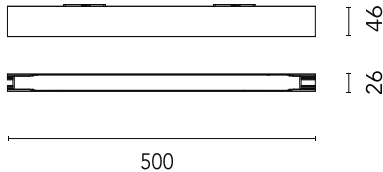

Download

Mounting instructions



Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	230
Driver output voltage (V)	48
Power supply	Integrated
Precabled	No

Accessories & Power Supply



REQUIRED
Accessory

Electrical

08.0611.14

The Tracking Magnet Profile Feed Connector



OPTIONAL
Accessory

Electrical

06.0157.00

4-pole, 0.75 mm2 section, 4-meter long, transparent power cable



OPTIONAL
Accessory

Electrical

08.0612.14

The Tracking Magnet Profile Intermediate Connector Straight




OPTIONAL
Accessory

Electrical

08.0614.14

The Tracking Magnet Profile Intermediate Connector Flexible/Electrical Corner



OPTIONAL
Accessory

Installation

08.0615.00


Ceiling fixing kit



OPTIONAL
Installation

08.8866.14

Fixed ceiling kit. 2 unit kit



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V, 24/48V. For remote installation.



OPTIONAL
Electrical

06.1988.40

Multifunction Smart Device for Tracking Magnet & Infra-Structure