


# FLOS

09.0100.29B9S Anodized Aluminium

## Thin LED 1034 mm


Designed by FLOS Architectural, 2015

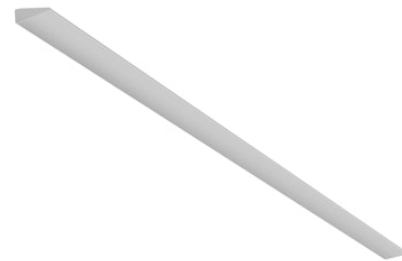

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Wall surface        |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 20.5                |
| Source flux (lm)       | 2133                |
| System flux (lm)       | 1863                |

### Physical

|             |                    |
|-------------|--------------------|
| Color       | Anodized Aluminium |
| Trim        | No                 |
| Orientation | Fixed              |
| IP internal | 20                 |
| IP external | 20                 |

### Download

Family spec sheet [↓ ZIP](#)

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Photometric

|                        |            |
|------------------------|------------|
| Lighting type          | Indirect   |
| Light distribution     | Asymmetric |
| CCT (K)                | 3000       |
| CRI>                   | 90         |
| Beam angle C0-180 (°)  | 101        |
| Beam angle C90-270 (°) | 43         |
| Extreme cut off        | No         |
| UGR <sub>L</sub>       | <10        |

Electrical

|                     |                                                     |
|---------------------|-----------------------------------------------------|
| Insulation class    | III                                                 |
| Forward voltage (V) | 24                                                  |
| Driver              | Remote excluded                                     |
| Dimmable            | No                                                  |
| Dimming type        | Non Dimmable,<br>Dimmable 1-10V,<br>Dimmable DALI 1 |
| Emergency type      | No                                                  |

Notes

42 LEDs

Accessories & Power Supply



REQUIRED  
Power supply

LEDSB60W24V-10V-U01  
LED Driver, 24VDC, 60W, 0-10V  
Dimming, 120-277V



REQUIRED  
Power supply

LEDSB96W24V-10V-U01  
LED Driver, 24VDC, 96W, 0-10V  
Dimming, 120-277V