


FLOS

09.0101.29B9S Anodized Aluminium

Thin LED 2040 mm


Designed by FLOS Architectural, 2015

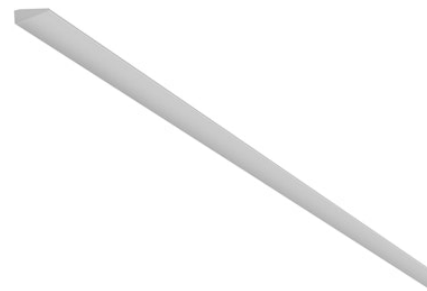

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	41
Source flux (lm)	4266
System flux (lm)	3726

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

[Family spec sheet](#)  ZIP

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

84 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V