


FLOS

09.0101.BZB9S Anodized Bronze

Thin LED 2040 mm


Designed by FLOS Architectural, 2015

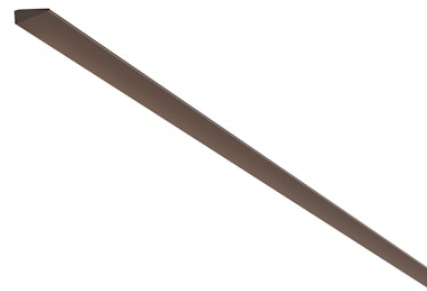

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	41
Source flux (lm)	4266
System flux (lm)	3726

Physical

Color	Anodized Bronze
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files

LDT / IES	↓ ZIP
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Luminous flux luminaire
3726 lm

Luminous flux luminaire
3726 lm

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

84 LEDs

09.0101.BZB9S

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V