


FLOS

09.0103.29B9S Anodized Aluminium

Thin LED 3042 mm


Designed by FLOS Architectural, 2015

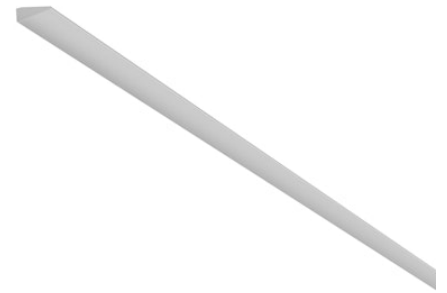

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	61.5
Source flux (lm)	6399
System flux (lm)	5588

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

126 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V