

# FLOS



 F7543031 Matte Black

## To-Tie T3



Designed by Guglielmo Poletti, 2022

10W - 495lm - 2700K - CRI> 90

Designed by Guglielmo Poletti Table lamp providing diffused light. Clear glass cylindrical lamp body available in multiple sizes. The handle is made of aluminum and also acts as a light emitter. Multi-led diffuser in specially designed white polycarbonate to avoid the Multi Shadow effect and dazzle. High efficiency LED source with a lifetime of more than 50.000 hours. Electric cable of useful length 180 cm, covered in black fabric and equipped with dimmer switch for ON/OFF and adjustment of the light flow between 10-100%. Plug-in power supply with interchangeable plugs. To-Tie is a future-proof lamp as no glue is used to assemble its different parts. The product can therefore be separated, replaced individually, and recycled separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

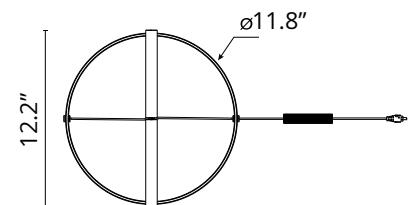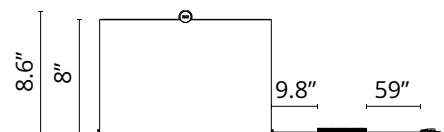

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607047637       |
| Mounting               | Table               |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 10                  |
| System flux (lm)       | 495                 |

### Physical

|                     |             |
|---------------------|-------------|
| Color               | Matte Black |
| Length (in)         | 12.2        |
| Cord color          | Black       |
| Net weight (lb)     | 5.95        |
| Gross weight (lb)   | 10.58       |
| Package height (in) | 12.6        |
| Package width (in)  | 15.55       |
| Package length (in) | 15.55       |
| Package volume (in) | 3046.8      |
| IP internal         | 20          |
| H2O stop            | No          |

### Download

Mounting instructions [PDF](#)

### Photometric Files

LDT / IES [ZIP](#)


### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



## Schematic light drawing



## Ecodesesign and Energy Labelling

This product contains a light source of energy efficiency class F




## Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |

## Electrical

|                    |                        |
|--------------------|------------------------|
| Insulation class   | III                    |
| Frequency (Hz)     | 50/60                  |
| Main voltage (Vac) | 24                     |
| LED current (mA)   | 500                    |
| Driver             | Remote included        |
| Dimmable           | Yes                    |
| Dimming type       | Electronic 24V         |
| Dimming interface  | Dimmer Integrated      |
| Plug type          | Type A, Type C, Type G |

## Spare Parts

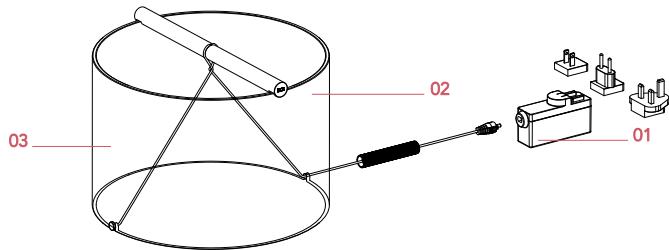

|     |  |           |
|-----|--|-----------|
| 00. | Led Board with connectors for To-Tie Table 3 | RF7543200 |
| 01. | Black plug assembly kit & 24V driver         | RF6600230 |
| 02. | Assembly Body for To-Tie Table 3 Black       | RF7543131 |
| 03. | Base for To-Tie Table 3                      | RF7543100 |



RF7543200

Led Board with connectors for  
To-Tie Table 3



RF6600230

Black plug assembly kit & 24V  
driver



RF7543131

Assembly Body for To-Tie Table 3  
Black



RF7543100

Base for To-Tie Table 3