

FLOS

 F9520039 Green

Wireline


Designed by Formafantasma, 2019

45W - 2793lm - 2700K - CRI> 90

Suspension lamp with diffused light. Tubular in transparent extruded glass and internal diffuser in opal PC. Ferrules made with CNC technology in satin stainless steel. Extruded cable in pink and forest green rubber. Injection molded PC rosette in the same finishes as the cable. The electronics integrated in the ceiling rose allows the use of different dimerization systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the luminous flux can be set during installation, with the push system included in the canopy. Useful length of the cable 3mt.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
System power (W)	45
Lumen Output (lm)	2793

Physical

Colour	Green
Length (mm)	1300
Cord colour	Green
Canopy colour	Green
Canopy length/diameter (mm)	130
Canopy height (mm)	70
Net weight (kg)	7.8
Package volume (m3)	0.05
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)


Technical Drawings

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Schematic light drawing



Photometric





Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy
Labelling


This product contains a light
source of energy efficiency
class F



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Spare Parts

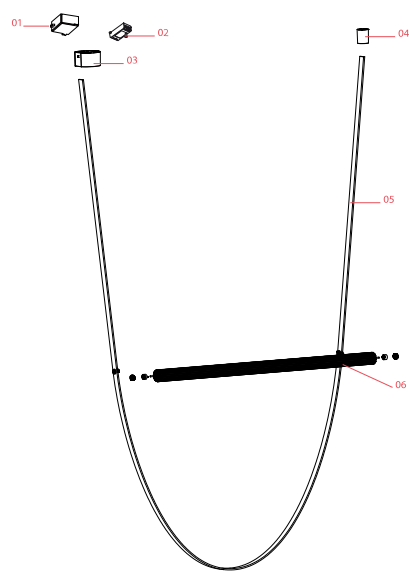

- | | | |
|-----|---|-----------|
| 00. | Push button and cables assembly for dimmer | RF27318 |
| 01. | Power supply unit for led | RF22934 |
| 02. | Led dimmer kit | RF34197 |
| 03. | Wireline Assembly Rose Cover Green | RF9523139 |
| 04. | Wireline Assembly Suspension Rose for Wirelines Green | RF30045 |
| 05. | WireLine Green Wire | F9522039 |
| 06. | WireLine Body | F9521000 |




RF27318
Push button and cables assembly
for dimmer



RF22934
Power supply unit for led



RF34197
Led dimmer kit



RF9523139
Wireline Assembly Rose Cover
Green



RF30045
Wireline Assembly Suspension
Rose for Wirelines Green



F9522039
WireLine Green Wire



F9521000
WireLine Body