

Wirering Grey

Designed by Formafantasma, 2018

16W - 712lm - 2700K - CRI> 90

Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	16
Lumen Output (lm)	712

Physical

Colour	Grey Cable/Grey Ring
Length (mm)	310
Net weight (kg)	0.94
Package volume (m3)	0.02
IP internal	20



Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

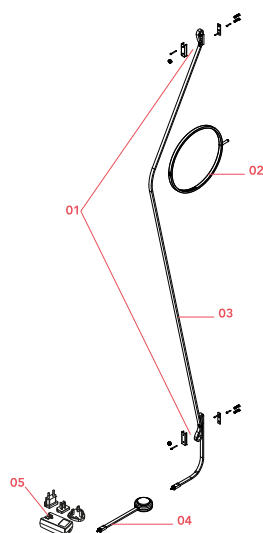

- | | | |
|-----|---|-----------|
| 01. | Wirering Kit with screws, nuts and components | RF9510200 |
| 02. | Wirering Ring assembly | RF26675 |
| 03. | Wirering Electrical mounting body assembly | RF26649 |
| 04. | Wirering Electrical mounting assembly with dimmer | RF26645 |
| 05. | Black plug assembly kit & 24V driver | RF6600230 |



RF9510200

Wiring Kit with screws, nuts and components



RF26675

Wiring Ring assembly



RF26649

Wiring Electrical mounting body assembly



RF26645

Wiring Electrical mounting assembly with dimmer



RF6600230

Black plug assembly kit & 24V driver