

# FLOS

 F9513030 Grey Cable/Black Ring

## Wirering Grey

Designed by Formafantasma, 2018




16W - 712lm - 2700K - CRI> 90

An exercise in reduction, stripped back to its most essential elements, offering beautifully rendered light from a spectacular wall sconce like you have never seen. The wire holds a simple ring fitted with an LED strip. The cable and ring are available in different color combinations and a range of finishes. Inspiration behind the design: Elevating what is hidden, showcasing the lamp's wire, we appreciate its sculptural beauty.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Wall                |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 16                  |
| System flux (lm)       | 712                 |

### Physical

|                     |                       |
|---------------------|-----------------------|
| Color               | Grey Cable/Black Ring |
| Length (in)         | 12.2                  |
| Net weight (lb)     | 2.08                  |
| Gross weight (lb)   | 3.73                  |
| Package volume (in) | 1044.24               |
| IP internal         | 20                    |

### Download

Mounting instructions [PDF](#)



### Photometric Files

LDT / IES



### Technical Drawings


2D



3D



## Schematic light drawing



## Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Indirect   |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |
| Extreme cut off    | No         |


## Electrical

|                    |                        |
|--------------------|------------------------|
| Insulation class   | III                    |
| Frequency (Hz)     | 50/60                  |
| Main voltage (Vac) | 100-240                |
| Driver             | Remote included        |
| Dimmable           | Yes                    |
| Dimming type       | Electronic 24V         |
| Dimming interface  | Dimmer Integrated      |
| Plug type          | Type A, Type C, Type G |
| Batteries inside   | No                     |

## Ecodesign and Energy

### Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

## Spare Parts

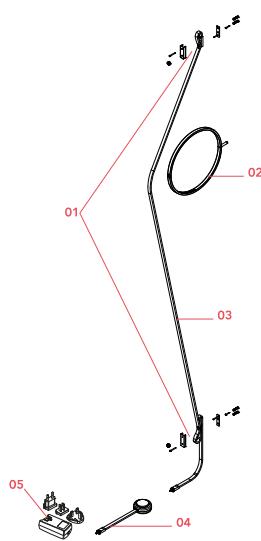

|     |   |           |
|-----|---|-----------|
| 02. | Wirering Ring assembly                            | RF26678   |
| 03. | Wirering Electrical mounting body assembly        | RF26649   |
| 04. | Wirering Electrical mounting assembly with dimmer | RF26645   |
| 05. | Black plug assembly kit & 24V driver              | RF6600230 |



RF26678

Wire ring assembly



RF26649

Wire electrical mounting body assembly



RF26645

Wire electrical mounting assembly with dimmer



RF6600230

Black plug assembly kit & 24V driver