

FLOS

 F9513044 Grey Cable/Gold Ring

Wirering Grey

Designed by Formafantasma, 2018




16W - 712lm - 2700K - CRI> 90

Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	16
Lumen Output (lm)	712

Physical

Colour	Grey Cable/Gold Ring
Length (mm)	310
Net weight (kg)	0.94
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions [PDF](#)



Photometric Files

LDT / IES



Technical Drawings


2D



3D



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No


Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy

Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

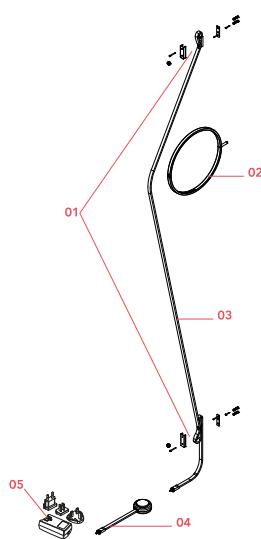

01.	Wiring Kit with screws, nuts and components	RF9510400
02.	Wiring Ring assembly	RF26677
03.	Wiring Electrical mounting body assembly	RF26649
04.	Wiring Electrical mounting assembly with dimmer	RF26645
05.	Black plug assembly kit & 24V driver	RF6600230



RF9510400

Wirering Kit with screws, nuts and components



RF26677

Wirering Ring assembly



RF26649

Wirering Electrical mounting body assembly



RF26645

Wirering Electrical mounting assembly with dimmer



RF6600230

Black plug assembly kit & 24V driver